
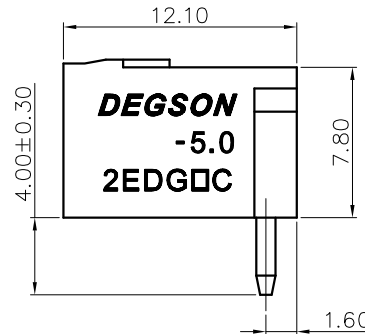
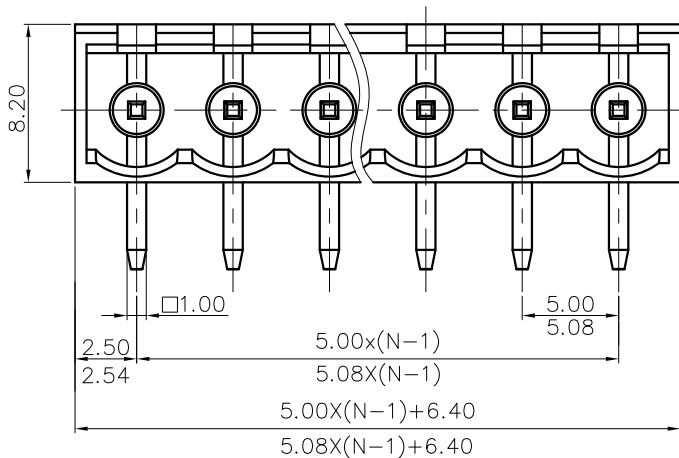


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



NOTES1:  
UL Standard  
1. Rated voltage/current : 300V / 15A  
2. Withstanding voltage : AC1600V/1Min.


IEC Standard

Pollution degree	2
Overtoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 5.00/5.08mm, Poles : N=02~24P  
3. Operating temperature: -40°C~+105°C  
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				±	∩	∇
To	Over	To	Over	To	Over	0.1/10	∠	±2'
6	10	10	30	30	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'


5. RoHS Compliance

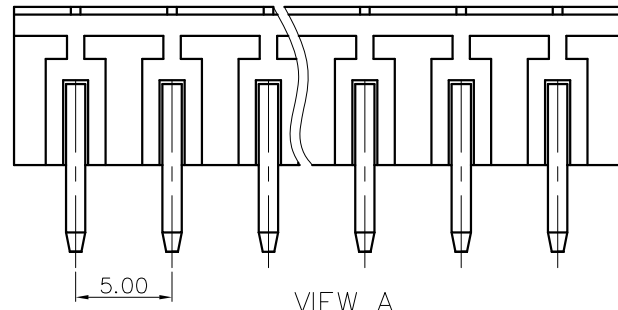

2EDGRC - 5.0/5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)  
2.(Blue)  
3.(Black)  
4.(Green)  
5.(Orange)  
6.(Red)  
7.(Transparent)  
8.(Yellow)  
9.(White)

(RoHS)  
00A-(Standard)

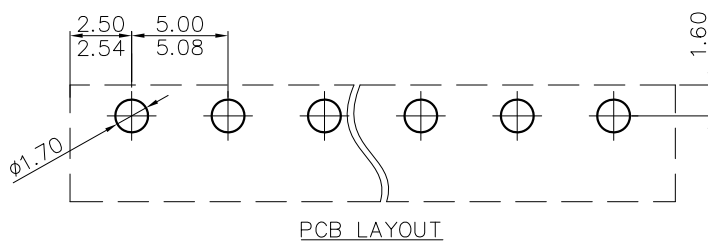

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 <b>DEGSON</b> NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 2EDGRC-5.0/5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	REV		DO	
	DRAWING NO.:		SHEET		1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE 1:1	