


| 未注公差/General tolerances(mm) | | | | | | | | | | | 0.1/10 ±2' | | |
|-----------------------------|--------------|---------------|----------------|----------------|----------------|----------------|-----------------|------------------|------------------|------------------|---------------|------------------|------------------|
| 0 ~ 3 | >3 ~ 6 | >6 ~ 10 | >10 ~ 18 | >18 ~ 30 | >30 ~ 50 | >50 ~ 80 | >80 ~ 120 | >120 ~ 180 | >180 ~ 250 | >250 ~ 315 | | >315 ~ 400 | >400 ~ 500 |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 |

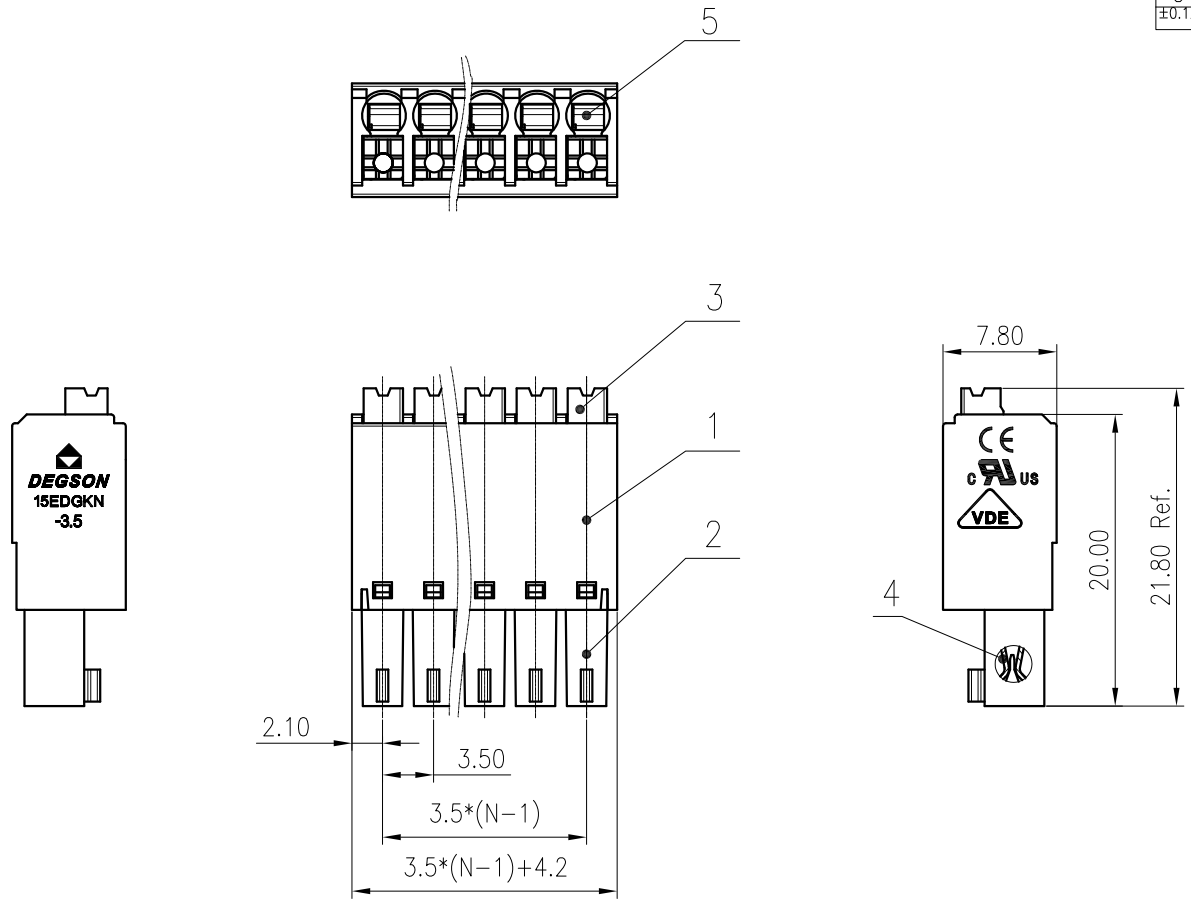

| ITEM | NAME OF PART | MATERIAL | NOTES |
|--|--------------|-----------------|-----------|
| 5 | Spring | Stainless steel | |
| 4 | Clamp | Copper alloy | Sn plated |
| 3 | Button | POM | UL94HB |
| 2 | Cover | PA66 | UL94V-0 |
| 1 | Housing | PA66 | UL94V-0 |
| UL 标准/UL Standard: | | B | C |
| 额定电压/电流/Rated Voltage(V)/Current(A) | | 300/8 | / 300/8 |
| EC 标准/IEC Standard: | | | |
| 过压类别/Overvoltage Category/污染等级/Pollution Degree | | II/2 | / / |
| 额定电压/电流/Rated Voltage(V)/Current(A) | | 250/8 | / / |
| 额定脉冲电压(KV)/Rate Impulse Voltage(kV) | | 2.5 | / / |
| 线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) | | 28~16/0.2~1.0 | |
| 间距/Pitch(mm)/线数范围/Poles | | 3.50/N=02~22P | |
| 剥线长度/Stripping length(mm) | | 10 | |
| 使用温度范围/Operating temperature(°C) | | -40~+105 | |
| 符合RoHS环保要求/Conform to RoHS | | Yes | |

| | | | |
|------------------------------|--------------------|---|-----------|
| MATERIAL: | / | SURFACE: | / |
| MAT NO.: | / | 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | |
| STATUS: | / | | |
| APPD: | Li GL 2020.04.01 | | |
| CHKD: | Mao J 2020.04.01 | | |
| DRFT: | Wang LX 2020.04.01 | NAME: 15EDGKN-3.5-XXP-1Y-1000A(H) | |
| DRAWING NO.: 15EDGKN-3.5-C08 | | REV | T0 |
| TYPE: CUSTOMER DRAWING | | SCALE: 2:1 | SHEET 1/1 |

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
| | | | | |

SIZE: A4 $\frac{mm}{inch}$