

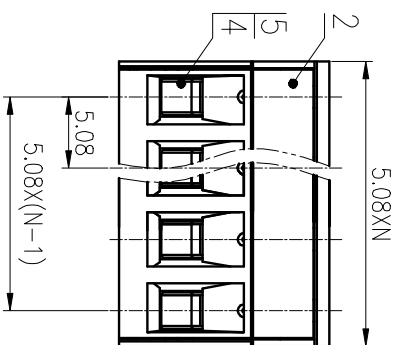
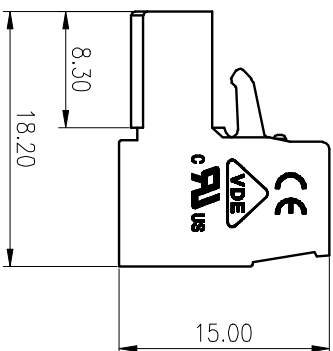


公差等级/General tolerances(mm)		公差等级/General tolerances(mm)										公差等级/General tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	

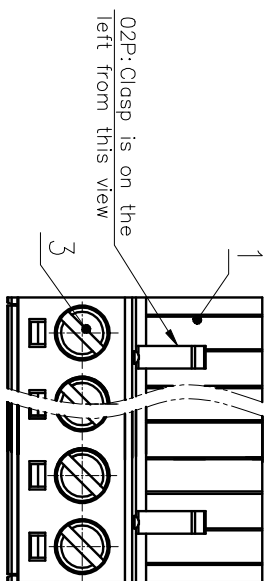

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	REV	T0
1	2	3	4	5	6	1/1			
<b>MATERIAL:</b> SURFACE: / MAT NO.: / STATUS: / APPD: / CHKD: / DRAFT: For JY.2020.03.24 DRAWING NO.: 10001600 NAME: <b>DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD</b> <b>2EDGK-5.08-XXP-1Y-1000A(H)</b> DRT: For JY.2020.03.24 TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1									

5	Clamp	Copper alloy	Sn plated
4	Cage	Copper alloy	M3/Ni plated
3	Screw	Steel	M3/Zn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category /污染等级 /Pollution Degree	III/2		
额定电压/电涌 /Rated Voltage(V)/Current(A)	320/20		
额定脉冲电压 (KV) /Rate Impulse Voltage(KV)	4.0		
额定扭矩 /Torque Tightening(N.m/Lb.in)	M3 0.5/4.43		
线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG)	1.0~2.5/28~12		
间距/Pitch(mm) /线径范围/Poles	5.08 /N=02~24P		
剥线长度 /Stripping length(mm)	7~8		
使用温度范围 /Operating temperature(°C)	-40~+105		
符合 RoHS 要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:	/		
PANTONE /RAL	/		