




# 慈溪市科发电子有限公司

## CIXI KEFA ELECTRONICS CO., LTD.

产品规格书

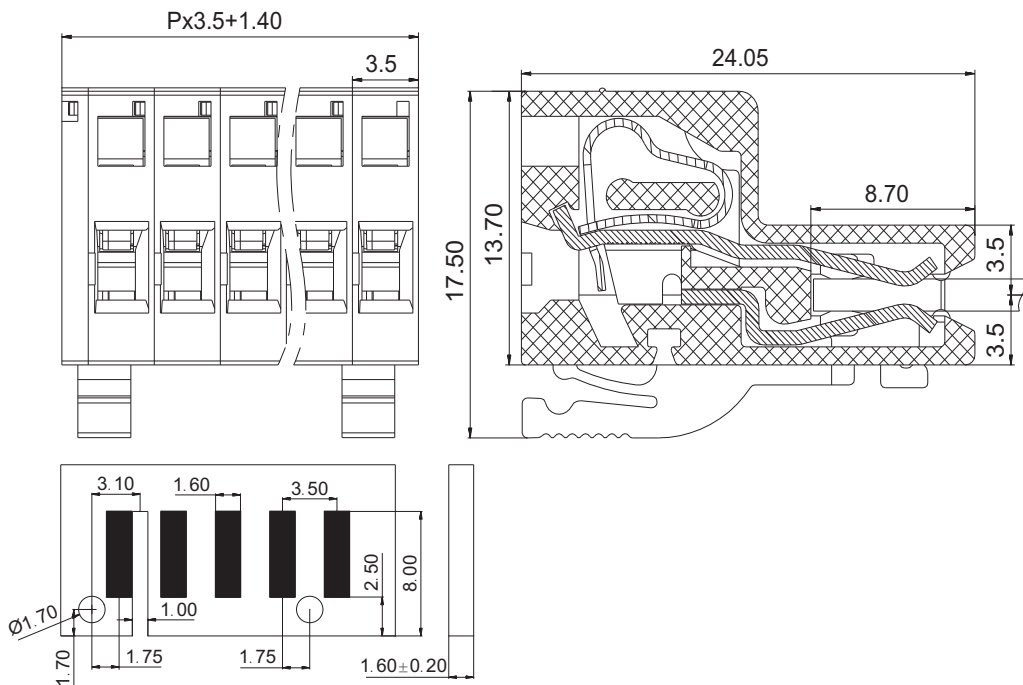

### Safety Approval

Electrical Standard	Rated voltage	Rated current	Wire range	Withstanding voltage
---------------------	---------------	---------------	------------	----------------------

<b>CE</b>	
UL	IEC
300V	250V
8A	7A
28-16 AWG	1.5mm <sup>2</sup>
AC2000V/1Min	

### Mechanical

Temp range	Strip length
------------	--------------

-40°C—+105°C	
7.0-8.0mm	

### Dimension

Pitch	Poles
-------	-------

3.5mm	
1P-xxP	
1.6±0.2mm	

### MATERIAL

Housing	Contact	Clips
---------	---------	-------

PA66 UL94V-0	
Phosphor bronze Ni plated	
Stainless Steel	

### HOW TO ORDER:



Series NO.

No. of Pitch

No. of Ploe

1	Single Pitch
2	Double Pitch

### Color

1	Grey	4	Green	7	Trans parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

塑胶件一般尺寸公差对照表

linear dimension (Tolerances Standard GB/T 14486-2008)

	0 to 10	over 10 to 20	over 20 to 30	over 30 to 40	over 40 to 50	over 50 to 70	over 70 to 90	over 90 to 110	over 110 to 130	over 130 to 150	over 150 to
variable range											
tolerance	±0.20	±0.25	±0.30	±0.40	±0.50	±0.60	±0.80	±1.00	±1.20	±1.30	±1.50



慈溪市科发电子有限公司  
CIXI KEFA ELECTRONICS CO., LTD.

NAME

KF2EDGDJ-3.5