

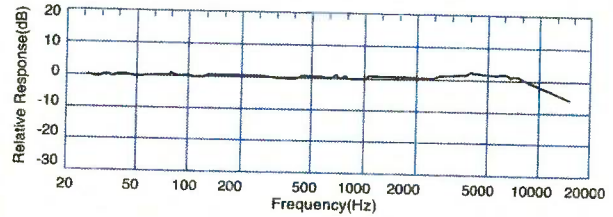


### Model: DVZ-6027

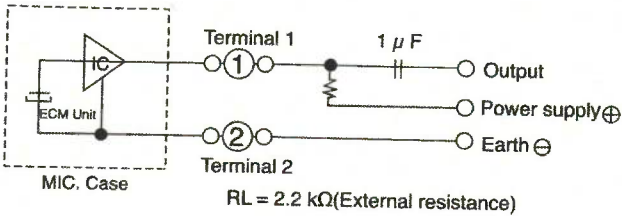




Item	Specification
Size	6.0x2.7mm
Sensitivity	-48-66dB
Frequency Range	50-20KHz
Directional Characteristics	Omnidirectional
Impedance	low-impedance
Current Consumption	Max 500uA
Standard Operating Voltage	3v
Operating Voltage Range	1.5-10v
Signal-to-noise Ratio	bigger than 58dB
Sensitivity Change	less 3db when the volt change 1.5v



### Model: DVZ-6027P



Item	Specification
Size	6.0x2.7mm
Sensitivity	-48-66dB
Frequency Range	50-20KHz
Directional Characteristics	Omnidirectional
Impedance	low-impedance
Current Consumption	Max 500uA
Standard Operating Voltage	3v
Operating Voltage Range	1.5-10v
Signal-to-noise Ratio	bigger than 58dB
Sensitivity Change	less 3db when the volt change 1.5v

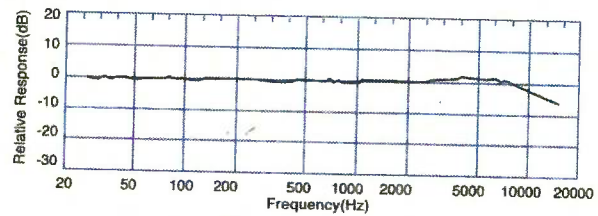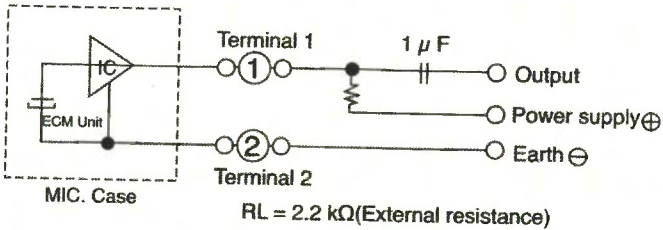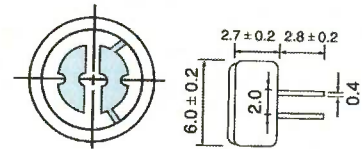

### Model: DVZ-6027PC



Item	Specification
Size	6.0x2.7mm
Sensitivity	-48-66dB
Frequency Range	50-20KHz
Directional Characteristics	Omnidirectional
Impedance	low-impedance
Current Consumption	Max 500uA
Standard Operating Voltage	3v
Operating Voltage Range	1.5-10v
Signal-to-noise Ratio	bigger than 58dB
Sensitivity Change	less 3db when the volt change 1.5v

