



乐清市裕林电子有限公司

Yueqing Yulin Electronic Co., Ltd

Add:F/6 No.19 KeAiSi Road XiangYang Industrial Zone,Liushi Town,YueQing,Zhejiang China 325600

Tel: 0577-27878383

Fax: 0577-27878383

Website: [www.filn.com](http://www.filn.com)

## SPECIFICATION FOR APPROVAL

# 规格说明书

CUSTOMER'S CODE

本厂代码: \_\_\_\_\_

DESCRIPTION

品 名: \_\_\_\_\_ Push Button Switch

SPECIFICATION

规 格: \_\_\_\_\_ 19mm

DATE

编制日期: \_\_\_\_\_

PART NO.

本厂型号: \_\_\_\_\_ FLM19-FJ-4

REFERENCE No.

档案编号: \_\_\_\_\_

Form Designer 编 制	Qualified By 审 核	Approved By 批 准
吴维继	陈永强	陈平

1.图片 Picture:



乐清市裕林电子有限公司

Yueqing Yulin Electronic Co., Ltd

Add: F/6 No.19 KeAiSi Road XiangYang Industrial Zone, Liushi Town, YueQing, Zhejiang China 325600


Tel: 0577-27878383

Fax: 0577-27878383

Website: [www.filn.com](http://www.filn.com)





## 2. 图纸 Drawing

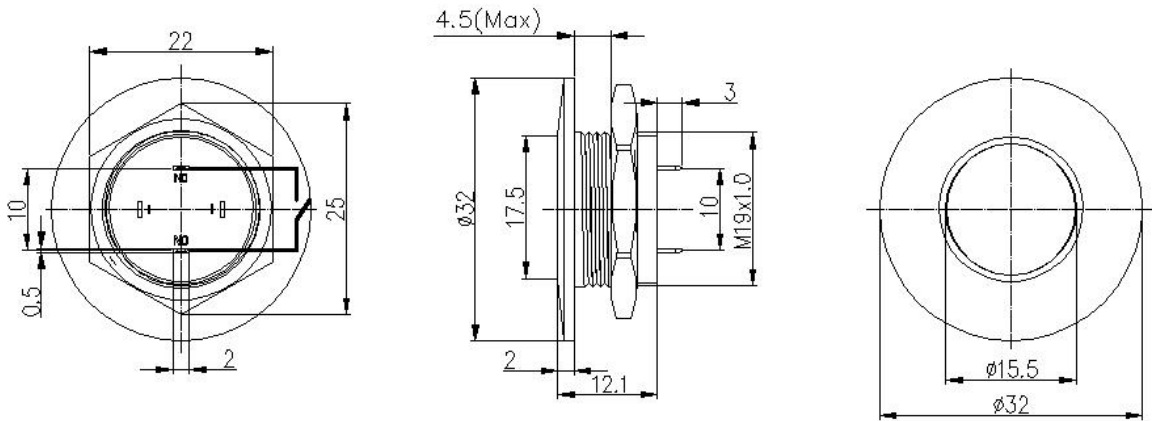

电气简图

安装孔图





# 乐清市裕林电子有限公司

Yueqing Yulin Electronic Co., Ltd

Add:F/6 No.19 KeAiSi Road XiangYang Industrial Zone,Liushi Town,YueQing,Zhejiang China 325600

Tel: 0577-27878383

Fax: 0577-27878383

Website: [www.filn.com](http://www.filn.com)

### 3 配件材料 Component Material

配件 Component name	材料 Material
导光按键 Lighting Source	/
按键 Actuator	304 不锈钢
外壳套筒 Housing	304 不锈钢
按钮引脚 Connect Terminal	H62 铜合金 H62 Copper Alloy
防水圈 O-Ring	SIL 硅胶 SIL silica gel
螺帽 Nut	H59 黄铜 H59 Brass
底座 Base	PA66+GF20%阻燃尼龙 PA66+GF20% nylon
光源 Light source	/
电阻 Resistor	/
触点 Contacts	银触点 AgCdO12

### 4 性能参数 Performance Parameter

项目 Items	参数 Parameter
开关额定电压 Switch Rated Voltage	12V DC
开关额定电流 Switch Rated Current	50mA DC
指示灯额定电压 Led Rated Voltage	/
指示灯额定电流 Led Rated Current	/
额定功率 Rated Power	0.6W (DC)
绝缘耐压 Insulation and voltage resistance	250V
接触电阻: Contact Resistance:	≤50mΩ
绝缘电阻: Isolation Resistance:	≥1000MΩ
机械寿命 Mechanical Life	10 万次 100,000times
电气寿命 Electrical Life	50,000times (12V/5mA)
工作环境温度 Operating Temperature	-25°C~+85°C
防护等级(头部) IP Degree	IP67 IK09
指示灯颜色 Led Color	/