


CUSTOMER/DWG NO:



DEVETECH ELECTRONICS CO. LTD

USED ON

2000±20

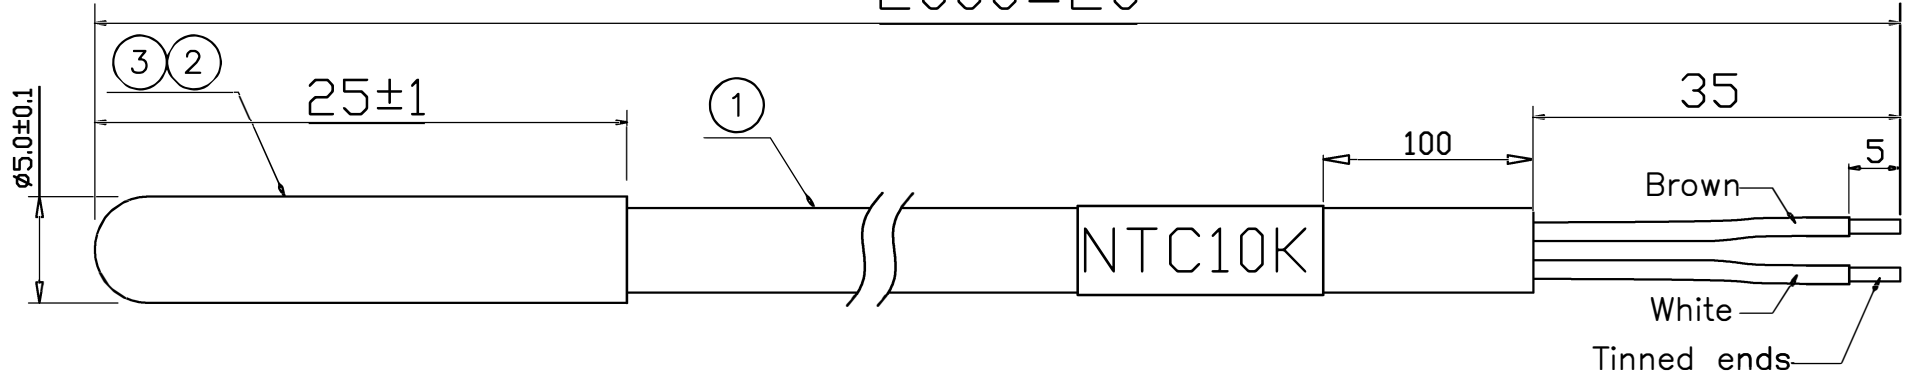

Notes:

1. Prevent from overheating during soldering/overmolding.
2. No open/short happen.
3. IP68 Rating.
4. Dielectric strength: 3000V AC.
5. RoHS compliance.

QTY	U/M	P/N	DESCRIPTION	ITEM
1	PC		NTC, R25=10KC±1%, B25/85=3435±1%	3
AR	MR		TPE overmolded tip: ø5x25mm, Black	2
AR	MR		TPE Black Round Cable, 24AWG, OD: 3.3MM, ID: 1.3MM, BLK+WHT	1

DWN	TDA	MATERIAL	HEAT TREAT
TBY			
CHK	ZCD	DV10K3435-1D-2000	
TCH			
APVD	ZAD		
ZAB	CABLE		
NAME			

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM		0 PLC	±
		1 PLC	±
		2 PLC	±
		3 PLC	±
		4 PLC	±
ANGLES±	ZTA		
SURFACE TEXTURE	ZST		

LOC	
ZLO	
DIST	
ZDI	

P	LTR	REVISION RECORD	DATE	DWN	APVD

ZFR	
ZTL	

8	7	6	5	4	3	2	1
ZUD	ZPA						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG NO

D

C

B

A