



DEVETECH ELECTRONICS CO. LTD

**TFT 7.0" MODULE
CUSTOMER: DACHS ELECTRONICA
P/N: DVD070IRT40-01**

DESIGNED BY	
CHECKED BY	
APPROVED BY	

Address: 11/F.,F.Block, Hang Lok Building, 130Wing Lok St., Hong Kong.
Address: A3L1, Youpinyishu, Huanmei Rd., Dameisha, Yantian district, Shenzhen, China
Tel: (86) 13632770721 Email: sales@devetechelectronics.com Website: www.devetechelectronics.com



CONTENTS		
N°	Contents	Page
-	Cover	1
-	Contents	2
-	Document Revision History	3
1	General description	4
2	General features	4
3	Absolute maximum ratings	5
4	Electrical specifications	6
5	Optical specifications	7
6	Block diagram	9
7	Pin description	10
8	Outline dimension	11
9	Timing characteristics	12
10	Reliability and inspection standard	13
11	Inspection criterion	14
12	Precautions	17



Revision N°	Revision Date	Contents	Remarks
V0	2013-10-29	New issue	



1. General description

The DVD070IF40-01 model is a color TFT LCD supplied by DEVETECH ELECTRONICS CO. LTD. This main module has a 7.0 inc diagonally measured active display area with 800(RGB)x480 resolution. Each pixel is divided into Red, Green and Blue sub-pixels and dots which are arranged in vertical stripes.

LCD color is determined with 262,000 colors signal for each pixel.

The DVD070IF40-01 has been designed to apply the interface method that enables low power, high speed and high contrast.

The DVD070IF40-01 is intended to support applications where thin thickness, wide viewing angle and low power are critical factors and graphic displays are important.

2. General features

Item	Display panel	Remark
Display mode	Normally white, transmissive LCD	
Viewing direction	12 O'clock	
Input signals	RGB	
Outside dimensions	164.9mm(W)x100mm(H)x4.70mm(T)	
Effective area	-	
Active area	153.60mm(W)x86.64mm(H)	
Number of pixels	800xRGBx480pixels	
Pixel pitch	0.1926mm(H)x0.1790mm(W)	
Pixel arrangement	RGB vertical stripes	
Touch	4 wires Resistive	

3. Absolute maximum ratings

The following are maximum values which, if exceeded may cause operation or damage to the unit.

Item	Symbol	Min	Typ	Max	Unit	Remark
Power for circuit driving	VDD	-0.3	-	3.3	V	
Power for circuit logic	VCI	-0.3	-	5.0	V	
LC operating voltage (*1)	Vop		3.3		V	
LED forward voltage	V _f	-	22.4	-	V	
LED forward current	I _r	-	40	-	mA	
LCD interface luminance	B _p	-	200	-	cd/m ²	
Storage humidity	H _{ST}	10	-	90	%RH	At 25±5°C
Storage temperature	T _{ST}	-30	-	80	°C	
Operating ambient humidity	H _{OP}	10	-	90	%RH	
Operating ambient temperature	T _{OP}	-20	-	70	°C	

(*1) Liquid crystal driving voltage.

Due to the characteristics of LC material, this voltage varies with environmental temperature.

(*2) Temp. >60°C, absolute humidity shall be less than 90%RH at 60°C

(*3) Temp. ≤60°C, 90%RH Max.

4. Electrical specification

Main window display

(Unless specified, the ambient temperature $T_a=25^{\circ}\text{C}$)

Properties		Sym.	Min	Typ	Max	Unit	Note
Supply voltage		VCC	-0.3	3.2	+0.3	V	Note
		VGH	-0.3	19.8	-0.3	V	Note
		VGL	-0.3	-7.8	-0.3	V	
		AVDD	-0.3	10.5	-0.3	V	
		VCOM		3.7		V	
Logic output voltage	Low voltage	VOL	0	-	0.1VDD	V	
	High voltage	VOH	0.9VDD	-	VDD	V	
Power consumption	White	Pw	T.B.D	T.B.D	T.B.D	mW	
	Black	Pb	T.B.D	T.B.D	T.B.D	mW	
	Vertical stripe	Pv	T.B.D	T.B.D	T.B.D	mW	

Note: The recommended operating conditions refer to a range in which operation of this product is guaranteed. Should this range is exceeded, the operation cannot be guaranteed even if the values may be without the absolute maximum ratings.

Accordingly, please make sure that the module is used within this range. And these current values are measured under the condition that all devices are stopped, each component is stable and logic signal is input.

5. Optical specifications

Item		Symbol	Condition	Min	Typ	Max
Color filter chromaticity (note 1)	White	x	$\theta=\Phi=0^\circ$	0.287	0.307	0.327
		y		0.321	0.341	0.361
		Y		29.0	32.0	35.0
	Red	x	$\theta=\Phi=0^\circ$	0.633	0.653	0.673
		y		0.312	0.332	0.352
		Y		15.55	18.55	21.55
	Green	x	$\theta=\Phi=0^\circ$	0.294	0.314	0.334
		y		0.555	0.575	0.595
		Y		58.71	61.71	64.71
	Blue	x	$\theta=\Phi=0^\circ$	0.117	0.137	0.157
		y		0.113	0.133	0.153
		Y		13.79	15.79	18.79
Transmittance (%) (note 3)		T	$\theta=\Phi=0^\circ$	--	5	--

Note 1: These items are measured by C light.

Note 2: Definition of Viewing angle (θ, ψ) refer to Fig.1 as below:



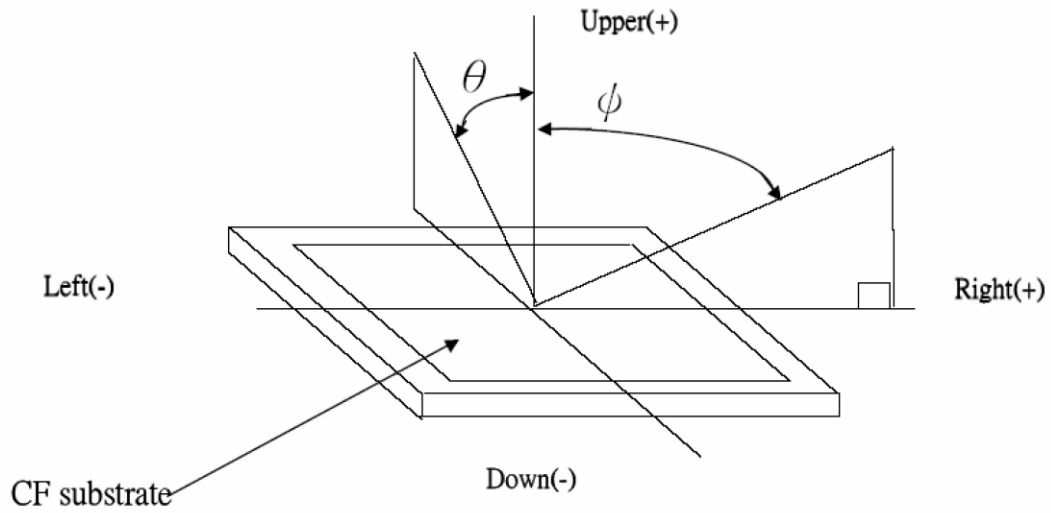


Fig.1 Definition of viewing angle

Note 3: Using LCD+EWV polarizer + corresponding backlight, reference only, measure device: BM-5A (TOPCON), viewing cone= 1° , $I_L=20Ma$.

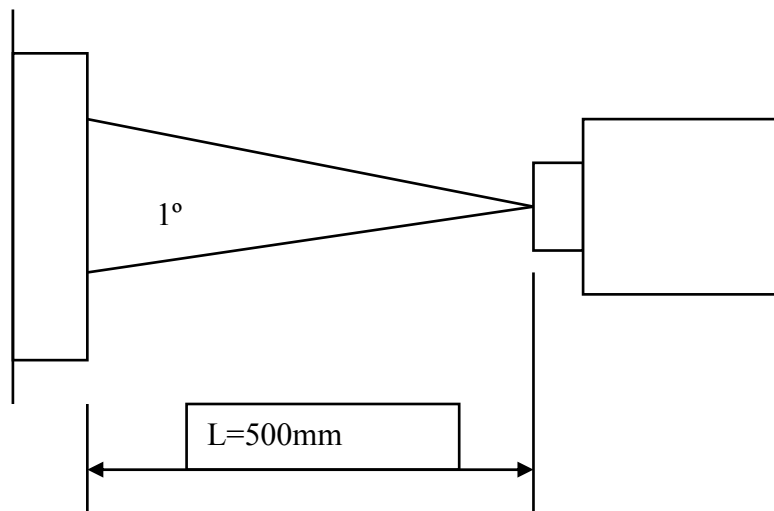

6. Block diagram

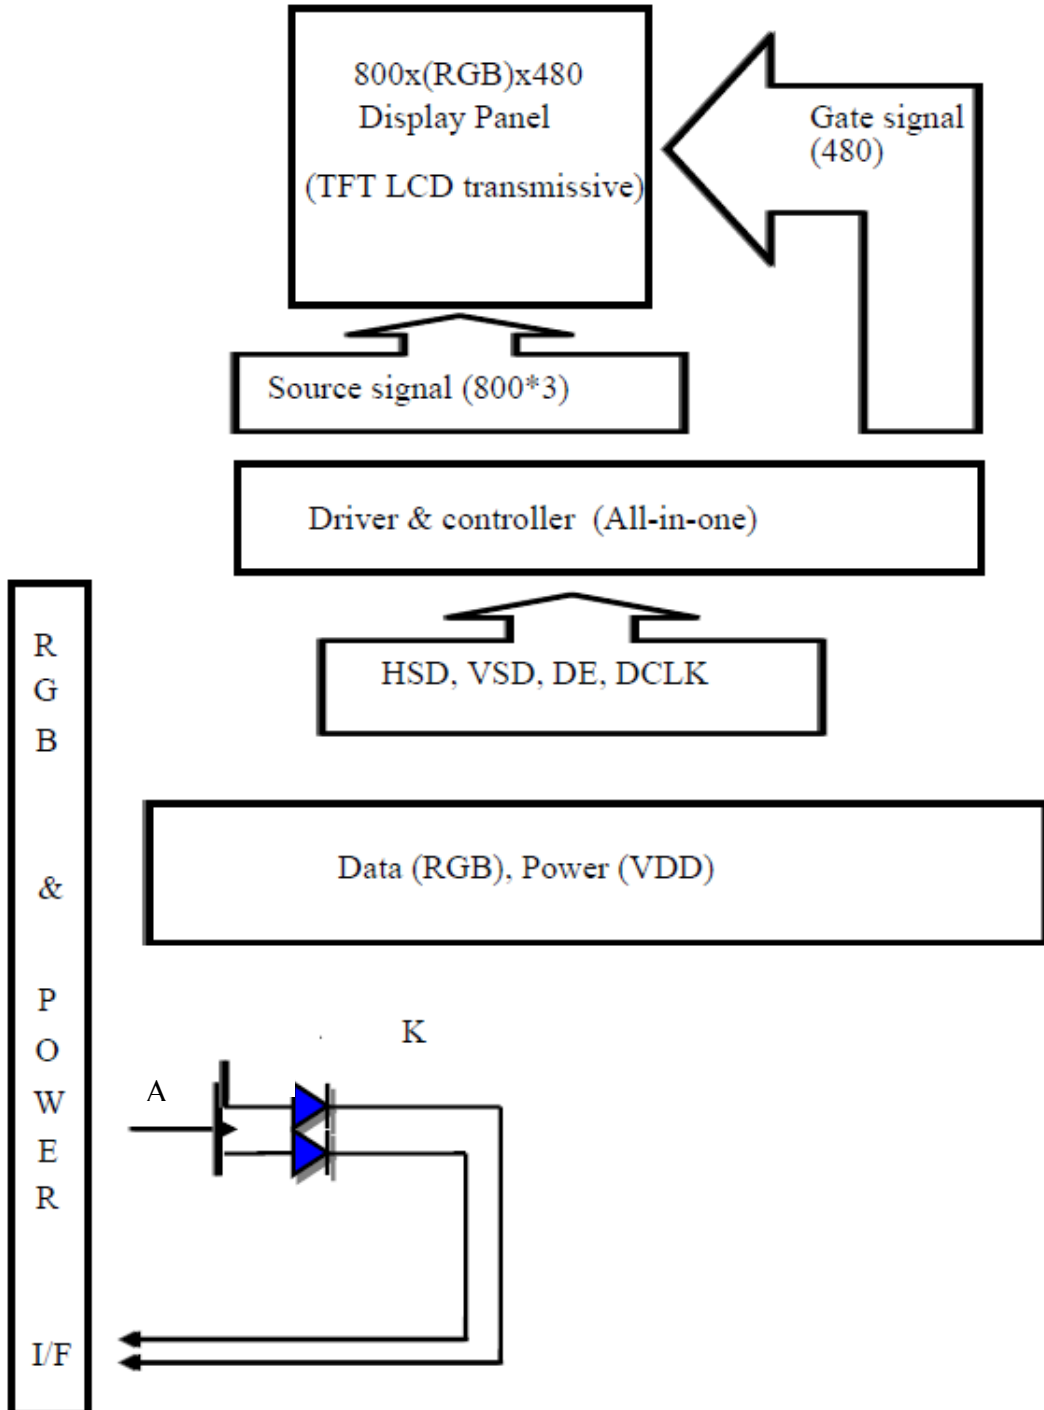


7. Pin description

Pin No.	Symbol	Function
1	LEDK	LED backlight (cathode)
2	LEDA	LED backlight (anode)
3	GNC	Ground
4	VCC	Power supply (digital 3.0V)
5	R0	Red data
6	R1	Red data
7	R2	Red data
8	R3	Red data
9	R4	Red data
10	R5	Red data
11	R6	Red data
12	R7	Red data
13	G0	Green data
14	G1	Green data
15	G2	Green data
16	G3	Green data
17	G4	Green data
18	G5	Green data
19	G6	Green data
20	G7	Green data
21	B0	Blue data
22	B1	Blue data
23	B2	Blue data
24	B3	Blue data
25	B4	Blue data
26	B5	Blue data
27	B6	Blue data
28	B7	Blue data
29	GND	Ground
30	CLK	Clock signal
31	DISP	Display on/off
32	HSYNC	Horizontal sync input in RGB mode
33	VSYNC	Vertical sync input in RGB mode
34	DEN	Data enable
35	NC	NC
36	GND	Ground
37	XR(NC)	Touch plane PIN/NC
38	YD(NC)	Touch plane PIN/NC
39	XL(NC)	Touch plane PIN/NC
40	YU(NC)	Touch plane PIN/NC


8. Outline dimension

REV. ECN No.	DESCRIPTION	DRAWN BY
#1.0	FIRST ISSUE	

NO.	Pin name
1	LED K
2	LED_A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YI
39	XL
40	YU

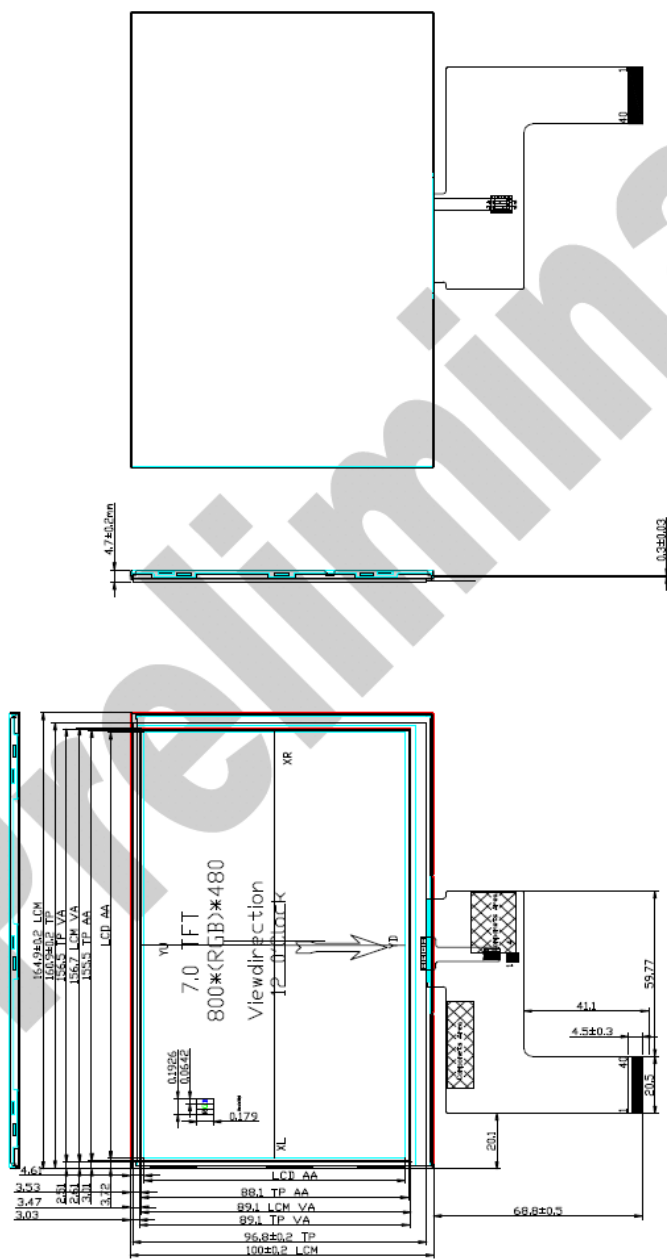


- NOTE:
1. LCD TYPE : 7.0 " TFT
 2. DRIVER IC : 12 0'CLOCK
 3. VIEWING DIRECTION : WHITE LED 14 CHIPS Parallel
 4. BACKLIGHT:
 5. OPERATION TEMP : -20°C~70°C
 6. STORAGE TEMP : -30°C~80°C
 7. GENERAL TOLERANCE: ±0.2
 8. * IS IMPORTANT DIMENSION




TOLERANCE	SCALE	N.T.S	DEVTech ELECTRONICS	DEVETECH ELECTRONICS CO. LTD
.X ± 0.1	UNITS	mm	E01106.07	MODEL:
.XX ±	MATERIAL		DRG. DATE	TITLE:
← ± 1°			DRG. BY	DWG NO
			CHK. BY	P 1 OF 1
			APPROVED	VER. 01

9. Timing characteristics

9.1. Sampling clock timing

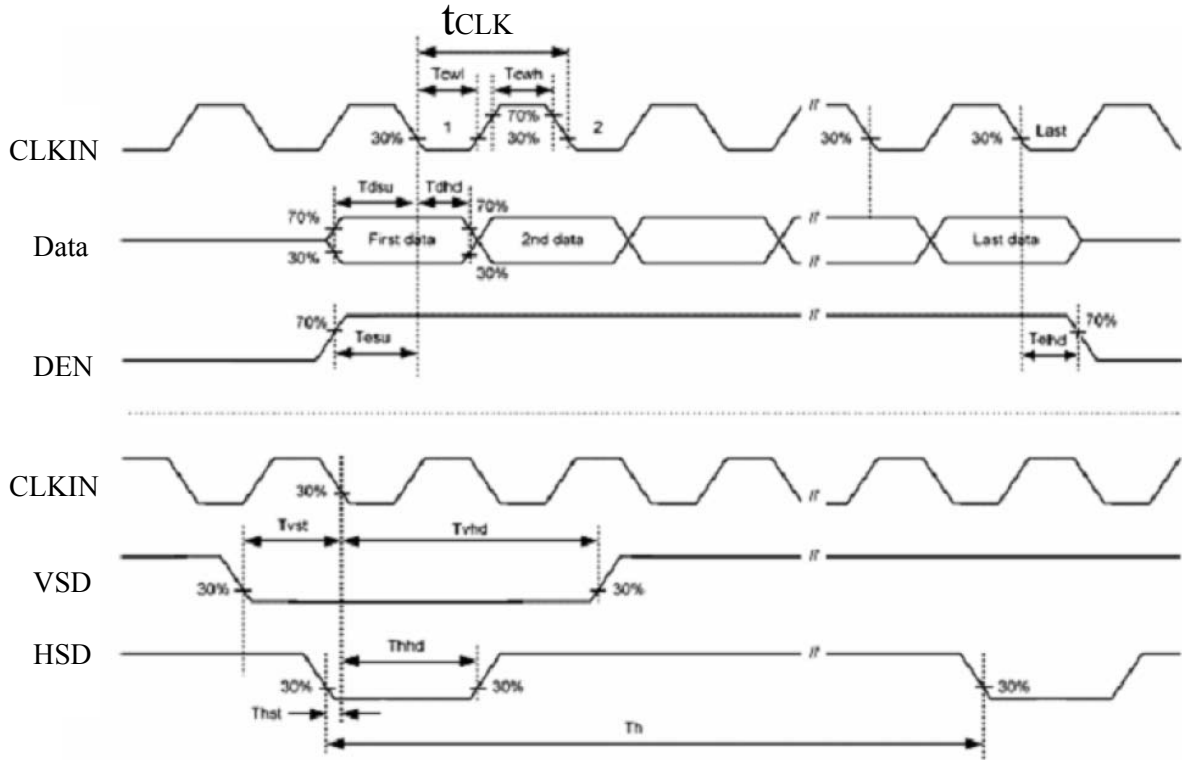

9.2. Power sequence

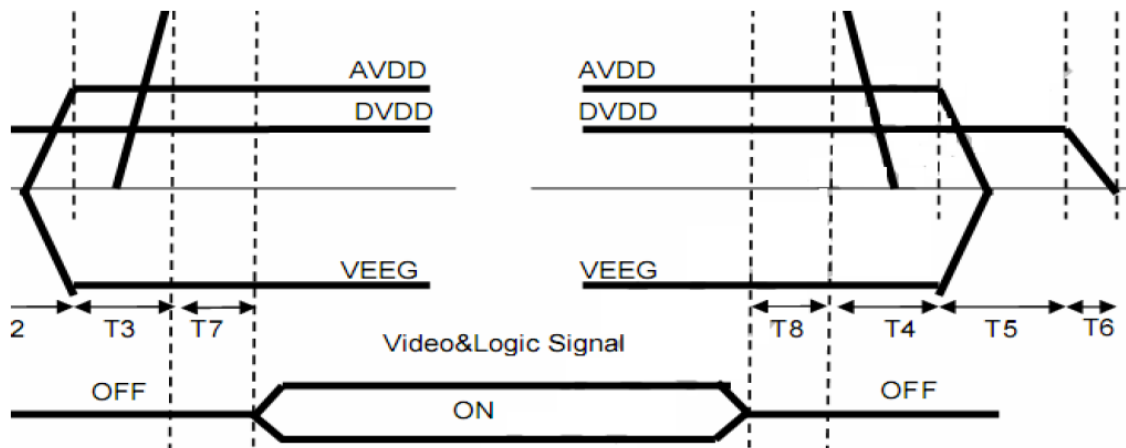

$$\begin{array}{ll}
 0 < T_1 \leq 10\text{ms} & T_5 > 0\text{ms} \\
 T_2 > 20\text{ms} & T_6 > 0\text{ms} \\
 T_3 > 10\text{ms} & 0 < T_7 \leq 10\text{ms} \\
 T_4 > 0\text{ms} & 0 < T_8 \leq 10\text{ms}
 \end{array}$$

9.3. Reset operation

(VCC=1.65~3.1V)

Item	Symbol	Unit	Min.	Typ	Max
Reset low-level width	tRES	ms	1	-	-
Reset rise time	trRES	μs	-	-	10

10. Reliability and inspection standard

No.	Test item		Test conditions	Remark
1	High temperature	Storage	70°C, 120Hr	Note
		Operation	60°C, 120Hr	
2	Low temperature	Storage	-30°C, 120Hr	Note
		Operation	-20°C, 120Hr	
3	High temperature and high humidity		60°C, 90%RH, 120Hr	Note
4	Temperature cycle	Storage	-10°C(1Hr)→25°C(5min)→60°C(1Hr) 32 cycles	Note
		Operation	-20°C(1Hr)→25°C(5min)→60°C(1Hr) 25 cycles	
5	Peeling off (storage)		≥500gf/cm	Note
6	FPC bending test		≥6000 times, 2/sec	Note
7	Vibration test (storage)		50Hz, 30min, Amplitude: 2cm, X/Y/Z directions	Note
8	Drop test		60cm/ 3corner/ 8face/ 1cycle	Note
9	Electrostatic discharge		Contact discharge: ±4KV Air discharge: ±10KV	

Note:

1. The test samples should be applied to only one test item.
2. Sample size for each test item is 5~10pcs.
3. For damp proof test, pure water (resistance>1MΩ) should be used.
4. In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.
5. EL evaluation should be excepted from reliability test with humidity and temperature. Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and fluorescent EL has.
6. After the reliability test, the test samples should be inspected after 2 hours at least.
7. Functional test is OK. Missing segment, shorts, unclear segment, non display, display abnormally, liquid crystal leak are not allowed.
8. After testing, the current Idd should be within initial value ±20%.
9. No low temperature bubbles, end seal loose and fall, frame rainbow, ACF bubble growing are allowable in the appearance test.

11. Inspection criterion

11.1. Sampling method

Unless otherwise agreed upon in writing, the sampling inspection shall be applied to the customer's incoming inspection.


1. Lot size: Quantity per shipment lot
2. Sampling type: Normal inspection, single sampling
3. Inspection level: II
4. Sampling table: MIL-STD-105D
5. Acceptable Quality Level (AQL): Major=0.65 Minor=1.5

11.2. Inspection method

1. Ambient condition:
 - Temperature: Room temperature $25\pm 5^{\circ}\text{C}$
 - Illumination: Single fluorescent lamp non-directive (300 to 700 Lux)
2. Viewing distance:

The distance between the LCD and the inspector's eyes shall be least 30-50cm.
3. Viewing angle:

The inspection shall be conducted within normal viewing angle range.


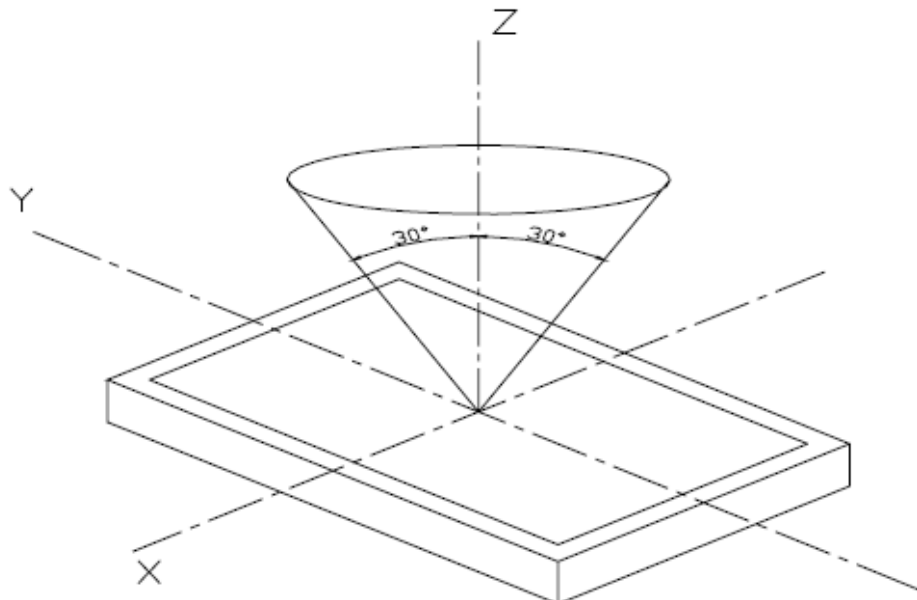


11.3. Inspection criteria

11.3.1. Major defect




No.	Item	Inspection standard	Classification of defects
1	All functional defects	1. No display 2. Display abnormally 3. Open or missing segment 4. Short circuit 5. Excess power consumption 6. Backlight no lighting, flickering and abnormal lighting	Major
2	Missing	Missing component	Major
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	Major

11.3.2. Minor defect

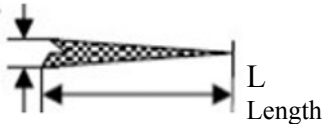No.	Item	Inspection standard	Classification of defects							
1	(spot defect) Black and white spot pinhole	For dark/white spot, size Φ is defined as $\Phi=(x+y)/2$	Minor							
		 <table border="1"> <thead> <tr> <th>Size Φ (mm)</th> <th>Acceptable quantity</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.10 \leq \Phi \leq 0.15$</td> <td>2</td> </tr> <tr> <td>$0.15 \leq \Phi \leq 0.2$</td> <td>1</td> </tr> <tr> <td>$0.2 < \Phi$</td> <td>0</td> </tr> </tbody> </table>		Size Φ (mm)	Acceptable quantity	$\Phi \leq 0.1$	Ignore	$0.10 \leq \Phi \leq 0.15$	2	$0.15 \leq \Phi \leq 0.2$
Size Φ (mm)	Acceptable quantity									
$\Phi \leq 0.1$	Ignore									
$0.10 \leq \Phi \leq 0.15$	2									
$0.15 \leq \Phi \leq 0.2$	1									
$0.2 < \Phi$	0									
2	(line defect) Black and white line polarizer scratch	Define: Width W	Minor							
		 <table border="1"> <thead> <tr> <th>Width (mm)</th> <th>Length(mm); Acceptable Qty</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.03$</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.05$</td> <td>$L \leq 3.0$; $N \leq 2$</td> </tr> <tr> <td>$0.05 < W \leq 0.1$</td> <td>$L \leq 2.0$; $N \leq 2$</td> </tr> <tr> <td>$0.1 < W$</td> <td>Define as spot defect</td> </tr> </tbody> </table>		Width (mm)	Length(mm); Acceptable Qty	$\Phi \leq 0.03$	Ignore	$0.03 < W \leq 0.05$	$L \leq 3.0$; $N \leq 2$	$0.05 < W \leq 0.1$
Width (mm)	Length(mm); Acceptable Qty									
$\Phi \leq 0.03$	Ignore									
$0.03 < W \leq 0.05$	$L \leq 3.0$; $N \leq 2$									
$0.05 < W \leq 0.1$	$L \leq 2.0$; $N \leq 2$									
$0.1 < W$	Define as spot defect									

No.	Item	Inspection standard	Classification of defects	
3	Polarizer defect	Dent or bubble (between the polarizer and glass)		Minor
		Size Φ (mm)	Acceptable Qty	
		$\Phi \leq 0.10$	Ignore	
		$0.10 < \Phi \leq 0.20$	2	
		$0.20 < \Phi \leq 0.30$	1	
	$0.30 < \Phi$	0		

11.3.3 Cosmetic defects

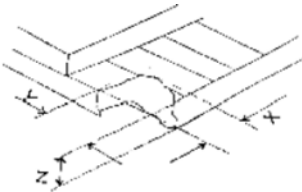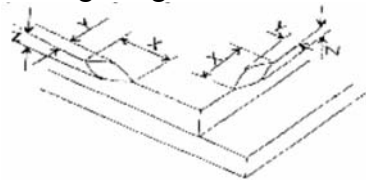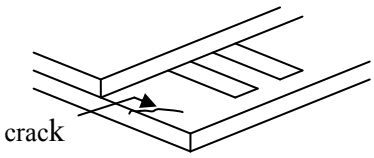No.	Item	Inspection standard	Classification of defects						
1	Glass defect	<p>1) Chip on the corner</p>  <table border="1" data-bbox="614 1086 1244 1164"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 3.0</td> <td>$\leq S$</td> <td>$\leq T$</td> </tr> </tbody> </table> <p>Remark: S=contact pad length; T=the thickness of glass Chips on the corner of terminal shall not be allowed to extend into the ITO pad or expose perimeter seal. Acceptable quantity $N \leq 2$.</p>	X	Y	Z	≤ 3.0	$\leq S$	$\leq T$	Minor
		X	Y	Z					
		≤ 3.0	$\leq S$	$\leq T$					
<p>2) Chip on the edge of glass</p>  <table border="1" data-bbox="614 1646 1244 1724"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Ignore</td> <td>≤ 0.5</td> <td>$\leq T$</td> </tr> </tbody> </table> <p>Acceptable quantity: $N \leq 2$</p>	X	Y	Z	Ignore	≤ 0.5	$\leq T$			
X	Y	Z							
Ignore	≤ 0.5	$\leq T$							
<p>3) Creak: Creaks tend to break are not allowed.</p> 									



12. Precautions

12.1. Handling precautions

1. The display panel is made of glass. Do not subject it to a mechanical shock or impact by dropping it.
2. If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
4. The polarizer covering the display surface of the LCD Module is soft and easily scratched. Handle this polarizer carefully.
5. If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten a cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcohol
6. Solvents other than those above mentioned may damage the polarizer. Especially, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
7. Extra care to minimize corrosion of the electrode. Water droplets, moisture condensation or a current flow in a high-humidity environment accelerates corrosion of the electrode.
8. Install the LCD Module by using the mounting holes. When mounting the LCD Module, make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
9. Do not attempt to disassemble or process the LCD Module.
10. NC terminal should be open. Do not connect anything.
11. If the logic circuit power is off, do not apply the input signals.
12. Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.
 - Do not alter, modify or change the shape of the lab on the metal frame.
 - Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
 - Do not damage or modify the pattern writing on the printed circuit board.
 - Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
 - Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
 - Do not drop, bend or twist LCM.



12.2. Storage precautions

When storing the LCD modules, the following precaution is necessary:

1. Store them in a sealed polyethylene bag. If properly sealed, there is no need for the dessicant.
2. Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.
3. The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped).

12.3. Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.

If the LCD modules have been operating for a long time showing the same display patterns the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be recovered by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD Module resulting from destruction caused by static electricity etc. exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections.