

Shape

KMI-1240




RoHS Compliant Available (eg KMIG1240)

Model Number	KMI-1240
Rated Frequency (Hz)	4,000 ± 500
Operating Voltage Range (VDC)	3 ~ 20
Current Consumption (mA)	Max. 8 @12 VDC
Sound Pressure Level (dB)	Min. 83dB@10 cm@12 VDC
Tone	Continuous
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +80
Weight (Gram)	2.6
Material	PPS UL-94 V-0 (Black)

Dimension

Tape & Reel Packaging
1 Reel : 320PCS
Tube Packaging
1 Tube : 25PCS

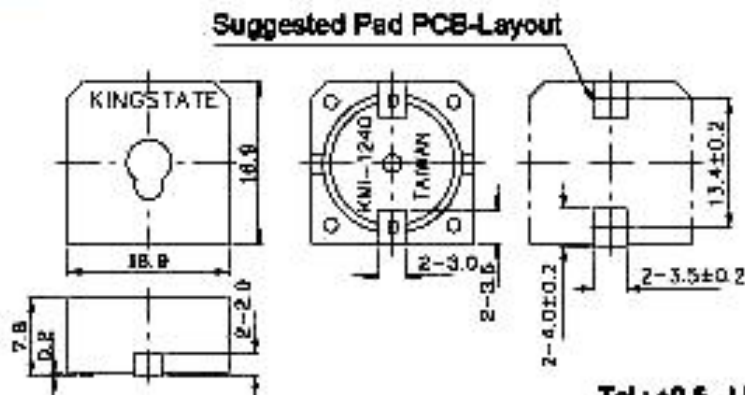

Tol: ±0.5 Unit: mm

Characteristic

