


OPTIONS

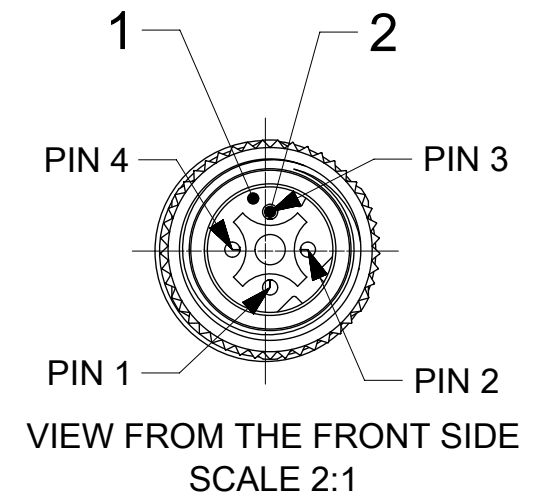

CABLE TYPE	WIRE GAUGE	CABLE JACKET	UL	CSA	STATIC	FLEXING	DRAG CHAIN TESTED	OTHER
CAB-12 4P(12)	0.34mm ²	TPU GREEN	STYLE 21215	YES	-40°C TO +80°C >5xO.D.	-20°C TO +60°C >15xO.D.	2 mio CYCLES	WELD SLAG RESISTANCE

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW P/N'S ADDED			molex CSE M12 ETH 4P DC MA STR WSOR XM DE							
	mm		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	ANGULAR TOL ± 1.0 °														
	4 PLACES		±		EC NO: 776660 DRWN: RSCHIEBER 2024/02/08 CHK'D: RSILLER 2024/02/09 APPR: RSILLER 2024/02/09										
	3 PLACES		±												
	2 PLACES		± 0.05												
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: BBRAUCH 2014/10/16 APPR: CBURGER 2014/10/16										
	0 PLACES		± 0.5												
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		120108		SEE SHEET 2		GENERAL MARKET		1 OF 2	

[illegible]

LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

9	8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---	---