





REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

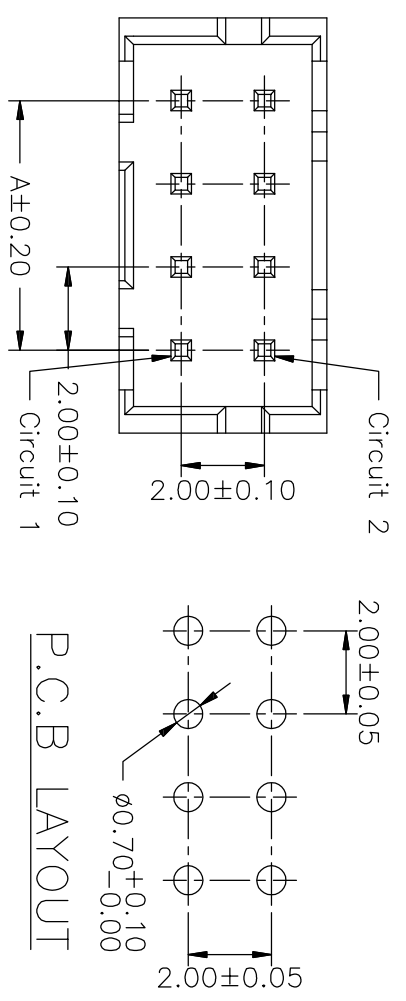

P.C.B LAYOUT

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 800V AC/minute
 - Temperature range: -25° C ~ +85° C
 - Insulation resistance: 1000MΩ Min
 - Contact resistance: 10mΩ Max

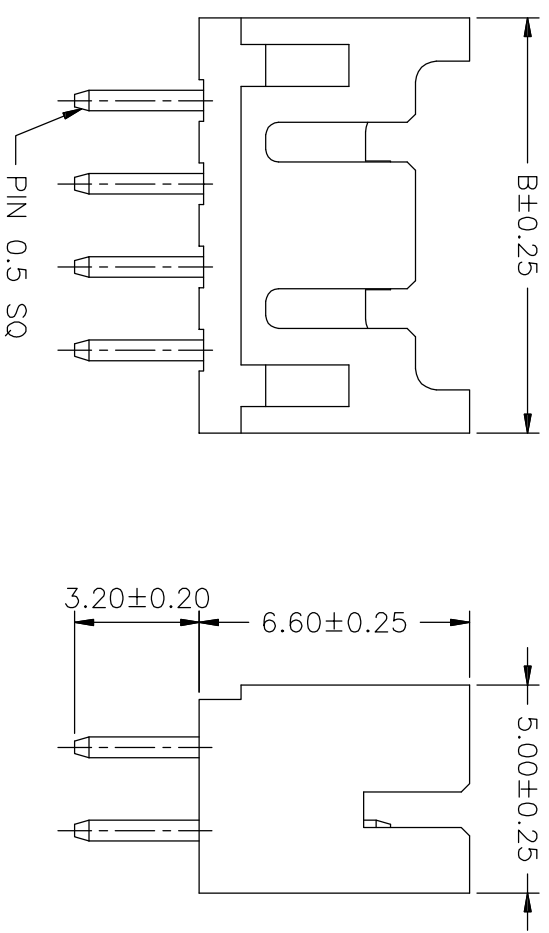

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2X2	2.00	6.00	2X16	30.00	34.00
2X3	4.00	8.00	2X17	32.00	36.00
2X4	6.00	10.00	2X18	34.00	38.00
2X5	8.00	12.00	2X19	36.00	40.00
2X6	10.00	14.00	2X20	38.00	42.00
2X7	12.00	16.00			
2X8	14.00	18.00			
2X9	16.00	20.00			
2X10	18.00	22.00			
2X11	20.00	24.00			
2X12	22.00	26.00			
2X13	24.00	28.00			
2X14	26.00	30.00			
2X15	28.00	32.00			

Ordering information

BFA - **XX** - **X** - **X** - **A**

Series No. 01-999

86



广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

No. of Positions: 04-50

Plating Option:
A: Au/Ag
B: Au/Sn
C: Au/Sn
D: Au/Sn
H: GF/Sn/20u"
S: Sn/20u"
Z: Special (Underline option is standard)

Insulator Material Option:
A: BK-PBT
F: BK-LCP
G: BK-PA6T
P: BK-PA6T
S: Special (Underline option is standard)

TOLERANCE: ANGLE ±2°

PROJECTION:

DATE: 2023/04/28

DRAWN: 郑双平

CHECKED:

APPROVED:

CUSTOMER: N/A

PART NO.: BFA-A86

SIZE: A4

UNIT: mm

SCALE: 1:1

SHEET: 1/1