

Pitch:2.00*2.00mm(0.0787"*0.0787")
 Box Header Right Angle Dip Type






BFBXX-XXA Series

Technical Data

Material:
 Contact Material: Brass
 Insulator Material:Black Polyester UL94V-0
 Standard:PA6T+30%G.F

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$
 Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$
 Withstanding Voltage:450V AC/minute

Mechanical:
 Operating temperatures: Gold Plated:-55°C~+105°C
 Tin plated:-40°C~+105°C
 Soldering temperature: +260°C,10s max.

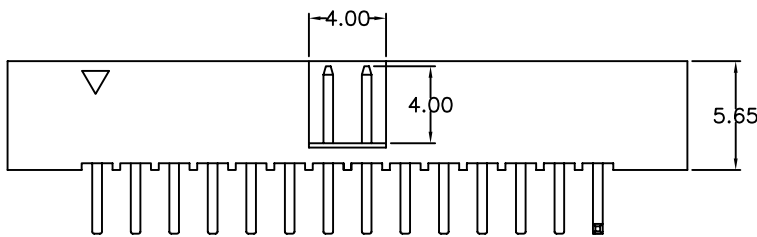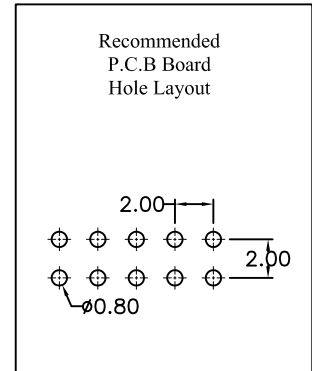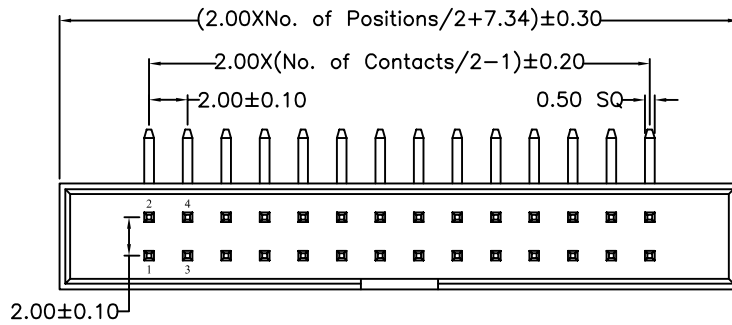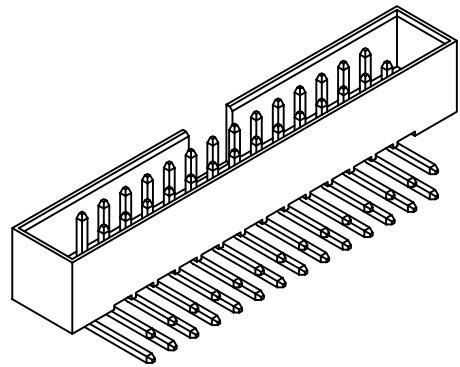

BFB	XX	-	X	X	A	XX
No. of Positions 06-64	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" H GF/Sn120μ" S Sn120μ" Z Special		Insulator Material Option A BK-PBT C BK-PA6T D BK-PA46 F BK-LCP S Special		Serial No. 01-99	