



CUSTOMER COPY



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

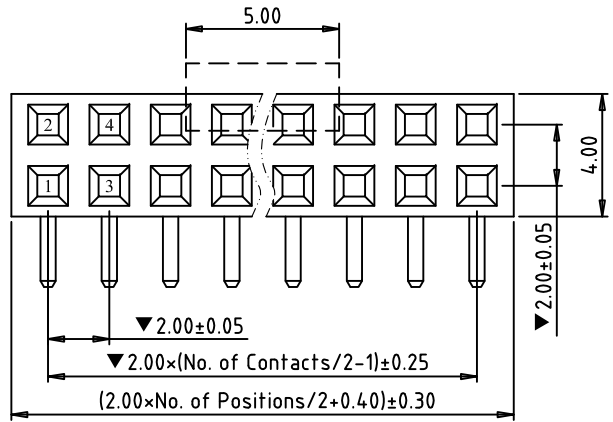

Technical Data

Contact: brass JIS C2680(Cuzn35)

Contact plating: see ordering information

Insulator: black glass filled polyester UL94V-0

Current rating: 1.5Amps

Contact resistance: 20mΩ max.

Insulation resistance: 1000MΩ min. at 100V

Withstanding Voltage: 450V AC/minute

Lead size pin: 0.5mm SQ

Average insertion force: 160g/contact max.

Average withdrawal force: 50g/contact min.


Retention force: 0.5Kg/contact min.

Mechanical life cycle: min.100

Operating temperature: -55°C to +105°C

Soldering temperature: 245°C±5° 5S

Critical Dimensions:▼

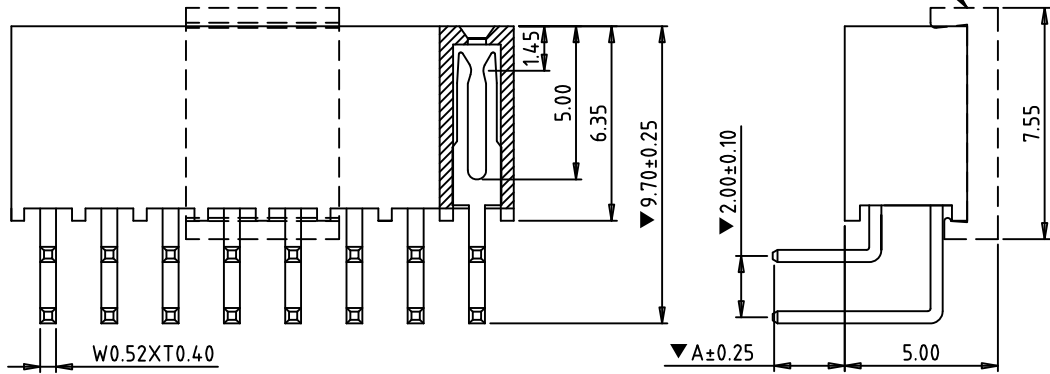

Ordering information

FFB2	63	0	-	Y	XX	X	X	X	XX
High Option 63=6.35mm	No. of Positions 04-80 (only for A type) 06-80 (only for C type)	Plating Option A G/F B Au3μ C Au5μ D Au10μ H GF/Sn120μ S Sn120μ Z Special (Underline option is standard)	Insulator Material Option A BK-PBT C BK-PA6T F BK-LCP G BK-PA9T S Special (Underline option is standard, include all insulators)	Type Option A Normal C With cap	Serial No. 04 A=3,6 05 A=2,3 06 A=2,8				

Packing	
1.General	
2.Tape&Reel	√
3.Tube	√
4.Tray	
5.Other	

**natconn**® 东莞市纳特康电子有限公司  
DONGGUAN NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:
ANGLE ±2°	2015/05/22	Pitch2.00*H6.35mm Female Header Dual Row Right Angle Type
X.XXX ±0.05	DRAWN 邹丽婷	CUSTOMER: N/A
X.XX ±0.20	CHECKED 于松	CUSTOMER P/N: N/A
X.X ±0.30	APPROVED 张丰志	PART NO.:
X. ±0.50		DRAWING NO.: FFB2630YAXX
		REV: A
		SIZE: A4
		UNIT: mm
		SCALE: 2:1
		SHEET: 1/1