


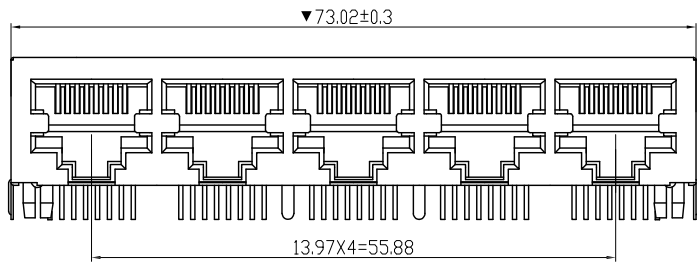


CUSTOMER COPY

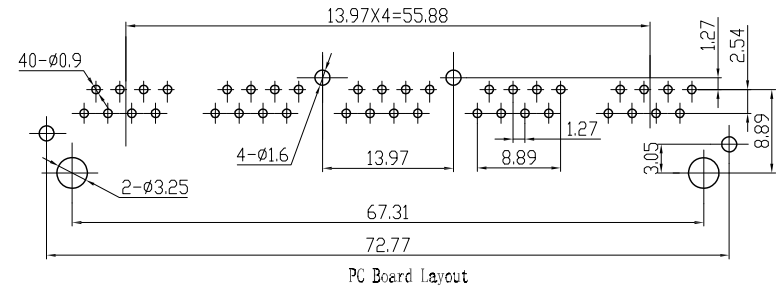

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

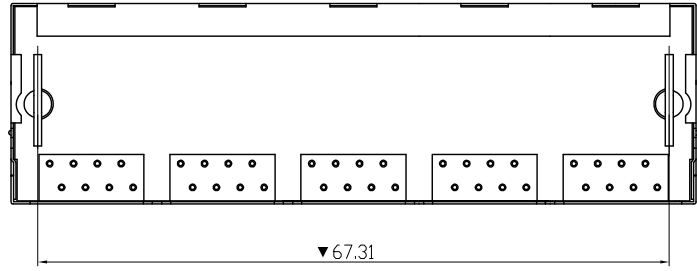

- NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
 - 5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz 1MIN.
- MECHANICAL:
- 1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
 - 2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 - 3. SHIELD : 0.20 ~ 0.25MM THICKNESS BRASS WITH TIN PLATED.
 - 4. MATING/UNMATING FORCE : 2.20C.F MAX.
 - 5. RETENTION STRENGTH : 7.75C.F MIN BETWEEN JACK AND PLUG.
 - 6. OPERATING LIFE : 600 CYCLES MIN.
- ENVIRONMENTAL:
- 1. STORAGE : -10°C ~ +10°C RELATIVE HUMIDITY 70%.
 - 2. OPERATION : 10°C ~ 170°C.

Remark:

- 1. Tolerances Unless Otherwise Specified
- 0±0.25 -00±0.20 ±000±0.10
- 2. The mark with ▼ is the key inspection dimension for QC

Ordering information:

RJ	08	-	XX	X	X	-	99	
Contacts: 08 8P8C 09 8P10C		Contact Plating 1 Tin 2 Gold Flash 3 Gold /Tin 4 Gold3µ" 5 Gold 5µ" 6 Gold10µ" 7 Gold30µ"		Layer A One B Two		Housing Colour B Black N Beige W White		Glide No 01-99

Packing	
1.General	
2.Tape&Reel	
3.Tube	
4.Tray	✓
5.Other	

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:
ANGLE ±2°	DATE	RJ45 JACK 8P8C (1X5 脚后3.05)
X.XXX ±0.01	DRAWN	CUSTOMER: N/A
X.XX ±0.25	CHECKED	CUSTOMER P/N: N/A
X.X ±0.35	APPROVED	PART NO.:
X. ±0.50		DRAWING NO.:
		REV: A
		SIZE: A4
		UNIT: mm
		SCALE: 1:1
		SHEET: 1/1