




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Material:
 Pin(outer sleeve): Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Gold Plated:2um/80u"Ni,Full gold
 Insulator(Black): Black (PPS) UL94V-0

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: $54m\Omega$ /contact
 Insulation resistance: $\geq 5000M\Omega$ at $V=500V$
 Dielectric Withstanding Voltage: 1000V AC Min
 Operating voltage: 60VAC/DC


Mechanical:
 Operating temperatures: Gold Plated:-55°C to+125°C
 Tin plated:-40°C to+105°C
Critical Dimensions: ▼

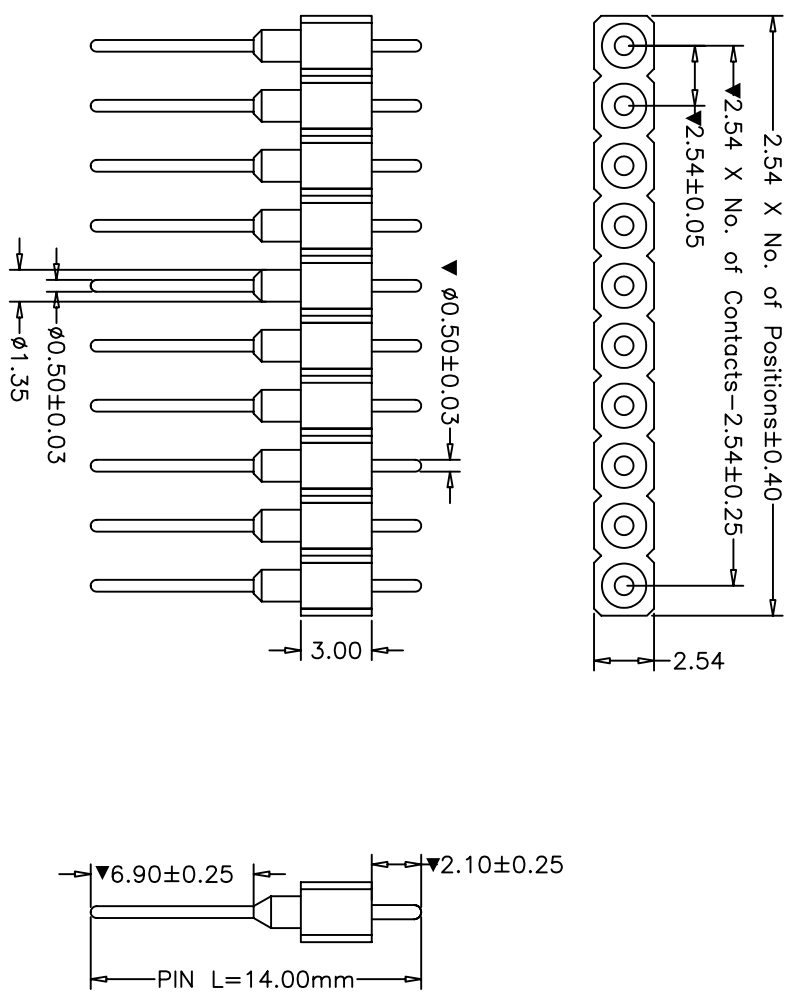

PHA - NNN 1 - A P 1400A

No. of Positions	Insulator Type code	Pin Plating code
1 Single row	1	1 Tin150u"
2 Double row	2	2 Tin200u"
		3 GF
		4 Gold2u"
		5 Gold3u"
		6 Gold10u"
		7 Gold15u"
		S Special

Packing		TOLERANCE: ANGLE $\pm 2^\circ$		TITLE: 2.54mmPitch SIP Adapters DIP	
1.General	✓	DATE	04-26-2011	CUSTOMER:	na
2.Tape&Reel		DRAWN	CY	PART NO.:	na
3.Tube		CHECKED		DRAWING NO.:	PHA-NNN1-AP1400A
4.Tray		APPROVED		SCALE:	1:1
5.Other				SIZE:	A4
				UNIT:	mm
				SHEET:	1/1



深圳市纳特康电子有限公司
 SHENZHEN NATCONN ELECTRONIC CO.,LTD