


CUSTOMER COPY



REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

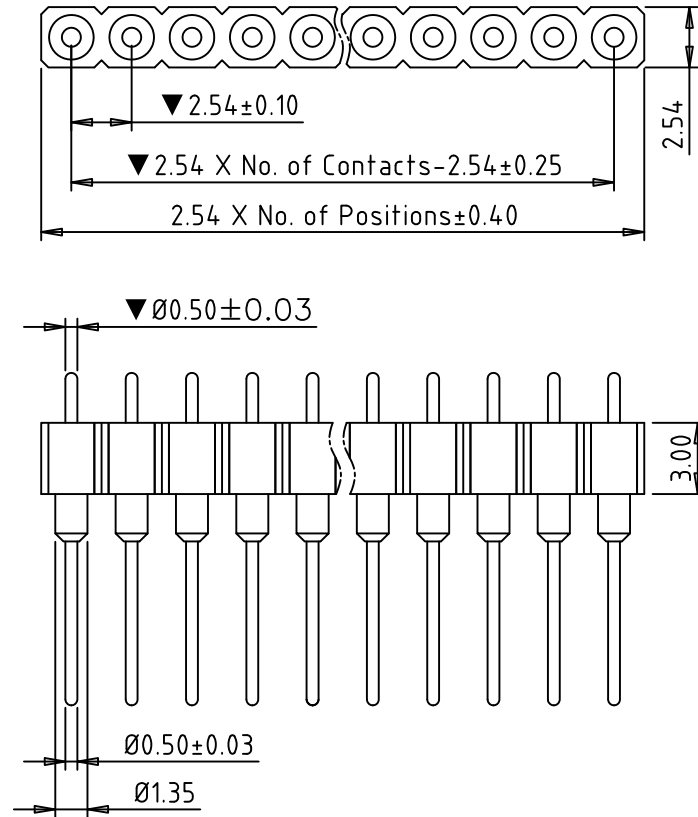

Technical Data

Sleeve: Brass, machined CuZn38Pb2
 Insulator: black glass filled polyester, PPS-GF30-FR, UL94V-0
 Plating: see ordering information
 Current rating: 3A
 Voltage rating: 60V_{DC}/AC
 Contact resistance: 4mΩ max.
 Insulation resistance: 5000MΩ min. at 500V_{AC}
 Dielectric Withstanding Voltage: 1000V AC Min
 Operating temperature: -55°C to +105°C
 Solderability: 245±5° 5S
 Critical Dimensions: ▼

PHA - NNN 1 - E P 1400A

<p>No. of Positions</p> <p>001~040</p>	<p>Insulator Type code</p> <p>1 Single row</p> <p>2 Double row</p>	<p>Pin Plating code</p> <p>1 Tin150μ"</p> <p>2 Tin200μ"</p> <p>3 GF</p> <p>4 Gold2μ"</p> <p>5 Gold3μ"</p> <p>6 Gold10μ"</p> <p>7 Gold15μ"</p> <p>S Special</p>
--	--	--

Packing		natconn ® 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD			
1.General	√	TITLE: 2.54mmPitch SIP Adapters DIP Special Pin Length 14.0mm			
2.Tape&Reel		TOLERANCE:	PROJECTION		
3.Tube		ANGLE ±2°	DATE	2018/05/20	
4.Tray		X.XXX ±0.05	DRAWN	江国注	
5.Other		X.XX ±0.25	CHECKED	雷邦军	
		X.X ±0.35	APPROVED	冯显东	
		X. ±0.50	SIZE: A4	UNIT: mm	SCALE: 1:1
			CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
			PART NO.:	DRAWING NO.: PHA-NNN1-EP1400A	REV: A
			SCALE: 1:1	SHEET: 1/1	