



CUSTOMER COPY

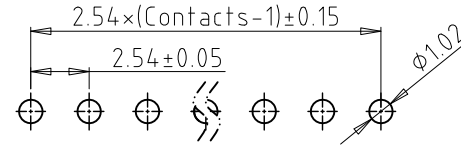



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

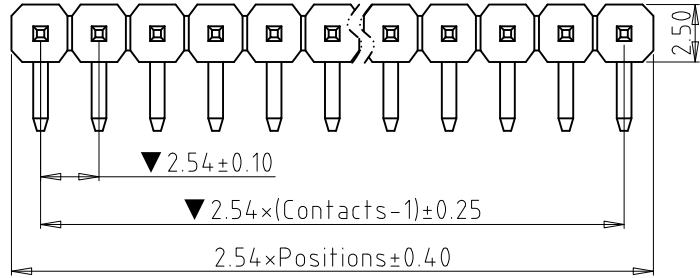

Recommended P.C.B
Layout(±0.05)

Technical Data

Contact: brass JIS C2700(CuZn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 1Kgf/contact min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

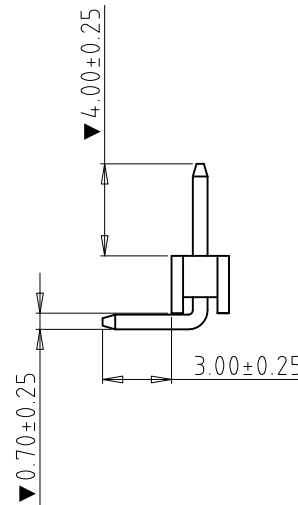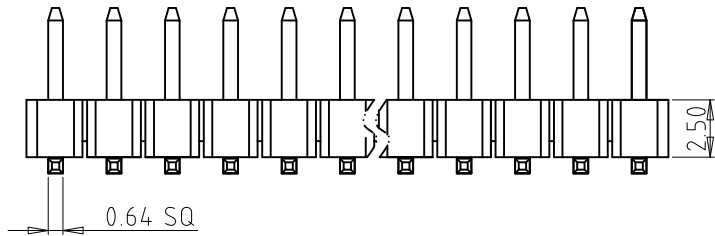

Ordering information

QHB1	25	1 - P	XX	X	X	A	323
High Option 25: H=2.50mm		No. of Positions 01-40	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" S Sn120μ" Z Special (Underline option is standard)	Insulator Material Option A BK-PBT F BK-LCP G BK-PA9T S Special (Underline option is standard)	Type Option A Normal C With cap	Serial No. 01-999	

natconn® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing 1.General 2.Tape&Reel 3.Tube 4.Tray 5.Other	TOLERANCE:	PROJECTION	TITLE: 2.54mm Pin Header Single Row Right Angle W=2.5mm		
	ANGLE ±2°	DATE	2015/12/24	CUSTOMER:	N/A
	X.XXX ±0.05	DRAWN	雷邦军	CUSTOMER P/N:	N/A
	X.XX ±0.20	CHECKED	唐建平	PART NO.:	QHB1251PA323
	X.X ±0.30	APPROVED	冯显东	DRAWING NO.:	QHB1251PA323
X. ±0.50			SIZE:	A4	
			UNIT:	mm	
			SCALE:	1:1	
			SHEET:	1/1	