



CUSTOMER COPY

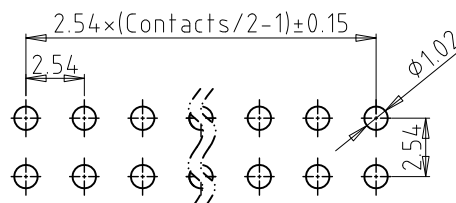



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

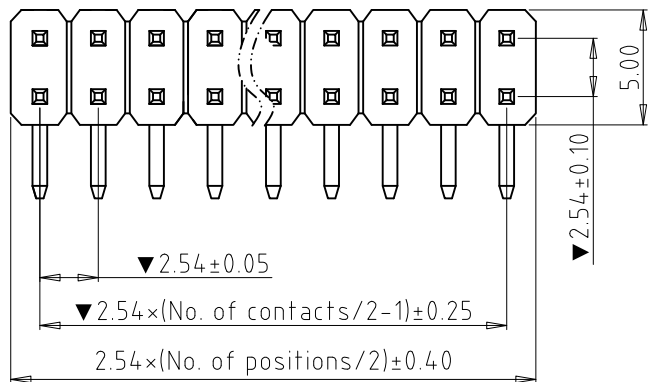

Recommended P.C.B. Layout(±0.05)

Technical Data

Contact: brass JIS C2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester UL94V-0  
 Current rating: 3Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 0.8Kgf/contact min.  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

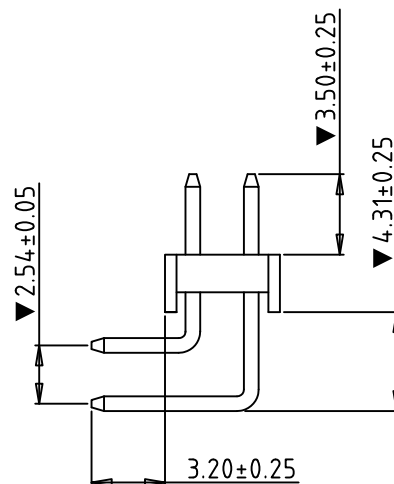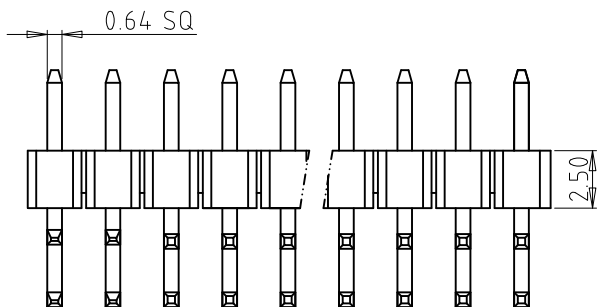

Ordering information

QHB2	25	1 - P	XX	X	X	A	301
High Option 25: H=2.50mm		No. of Positions 02~80	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" S Sn120μ" Z Special (Underline option is standard)	Insulator Material Option A BK-PBT F BK-LCP G BK-PA9T S Special (Underline option is standard)	Serial No. 01~999		

Packing	
1.General	√
2.Tape&Reel	
3.Tube	
4.Tray	
5.Other	

**natconn**® 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE: 2.54*2.54mm Pin Header Dual Row Right Angle,A=3.20 B=3.50mm		
ANGLE ±2°	DATE	2017/02/10		
X.XXX ±0.05	DRAWN	雷邦军	CUSTOMER: N/A	CUSTOMER P/N: N/A
X.XX ±0.20	CHECKED	唐建平	PART NO.:	DRAWING NO.: QHB2251PA301
X.X ±0.30	APPROVED	冯显东	SIZE: A4	UNIT: mm
X. ±0.50			SCALE: 1:1	SHEET: 1/1