

OMIT series

10A Miniature Power PC Board Relay

Appliances, HVAC, Office Machines.

- UL File No. E58304
- CSA File No. LR48471
- VDE File No. 6678
- SEMKO File No. 8713114
- SEV File No. 97550375

Features

- Meet UL 508, VDE0435, SEMKO and SEV requirements.
- 1 Form A contact arrangements.
- UL TV-5 rating available.
- Immersion cleanable, sealed version available.
- Meet 5,000V dielectric voltage between coil and contacts.
- Meet 10,000V surge voltage between coil and contacts (1.2 / 50µs).

Contact Data @ 20°C

Arrangements: 1 Form A.
Material: AgSnO
Max. Switching Rate: 300 ops./min. (no load).
 30 ops./min. (rated load).
Expected Mechanical Life: 10 million operations (no load).
Expected Electrical Life: 100,000 operations (rated load).
Minimum Load: 100mA @ 5VDC.
Initial Contact Resistance: 100 milliohms @ 1A, 6VDC.

Contact Ratings

Ratings: 10A @ 240VAC resistive,
 TV-5 @ 120VAC tungsten 25,000ops.
Max. Switched Voltage: AC: 240V.
 DC: 110V.
Max. Switched Current: 10A.
Max. Switched Power: 2,400VA, 300W.

Initial Dielectric Strength

Between Open Contacts: 1,000VAC 50/60 Hz. (1 minute).
Between Coil and Contacts: 5,000VAC 50/60 Hz. (1 minute).
Surge Voltage Between Coil and Contacts: 10,000V (1.2 / 50µs).

Initial Insulation Resistance

Between Mutually Insulated Elements: 1,000M ohms min. @ 500VDCM.

Coil Data

Voltage: 3 to 48VDC.
Nominal Power: 720 mW (OMI-D), 540mW (OMI-L).
Coil Temperature Rise: 45°C max., at rated coil voltage (OMI-D).
 35°C max., at rated coil voltage (OMI-L).
Max. Coil Power: 130% of nominal.
Duty Cycle: Continuous.

Coil Data @ 20°C

OMIT-L Sensitive				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
3	176.5	17	2.25	0.15
5	106.4	47	3.75	0.25
6	88.0	68	4.50	0.30
9	58.0	155	6.75	0.45
12	44.4	270	9.00	0.90
24	21.8	1,100	18.00	1.20
48	10.9	4,400	36.00	2.40
OMIT-D Standard				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
3	240.0	12.5	2.10	0.15
5	138.9	36	3.50	0.25
6	120.0	50	4.20	0.30
9	78.3	115	6.30	0.45
12	60.0	200	8.40	0.90
24	29.3	820	16.80	1.20
48	14.5	3,300	33.60	2.40

Operate Data

Must Operate Voltage:
 OMIT-D: 70% of nominal voltage or less.
 OMIT-L: 75% of nominal voltage or less.
Must Release Voltage: 5% of nominal voltage or more.
Operate Time: OMIT-D: 15 ms max.
 OMIT-L: 20 ms max.
Release Time: 8 ms max.

Environmental Data

Temperature Range:
Operating: OMT-D:
 -30°C to +55°C
 (no water condensation and no water drop.)
 OMT-L:
 -30°C to +70 °C
 (no water condensation and no water drop.)
Vibration, Mechanical: 10 to 55 Hz., 1.5mm double amplitude
Operational: 10 to 55 Hz., 1.5mm double amplitude.
Shock, Mechanical: 1,000m/s² (100G approximately).
Operational: 100m/s² (10G approximately).
Operating Humidity: 20 to 85% RH.

Mechanical Data


Termination: Printed circuit terminals.
Enclosure (94V-0 Flammability Ratings):
 OMIT-SS: Vented (Flux-tight) plastic cover.
 OMIT-SH: Sealed plastic case.
Weight: 13g approximately.

Ordering Information


Typical Part Number ▶	OMIT	-SS	-1	12	L	M
1. Basic Series: OMIT = Miniature Sealed PC Board Relay						
2. Enclosure: SS = Vent (Flux-tight)* plastic cover. SH = Sealed, plastic case.						
3. Termination: 1 = 1 pole						
4. Coil Voltage: 03 = 3VDC 06 = 6VDC 12 = 12VDC 48 = 48VDC 05 = 5VDC 09 = 9VDC 24 = 24VDC						
5. Coil Input: D = Standard (720mW) L = Sensitive (540mW)						
6. Contact Arrangement: Blank = 1 Form C, SPDT M = 1 Form A, SPST-NO						

* Not suitable for immersion cleaning processes.


Outline Dimensions

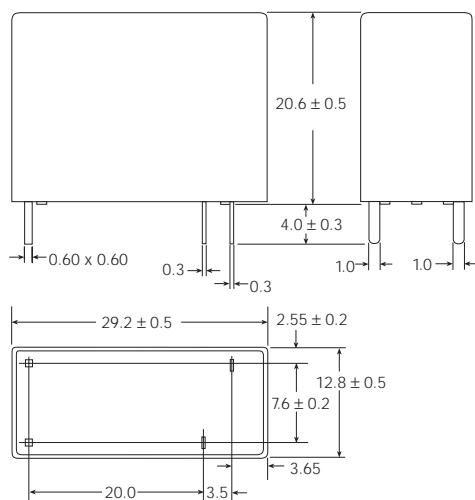

Wiring Diagram (Bottom View)




PC Board Layout (Bottom View)

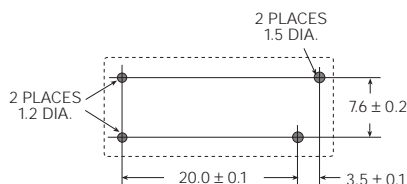


Reference Data

Coil Temperature Rise

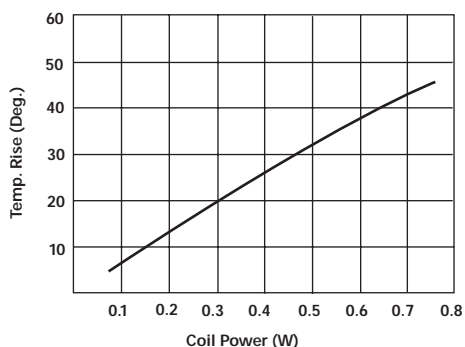

Operate Time

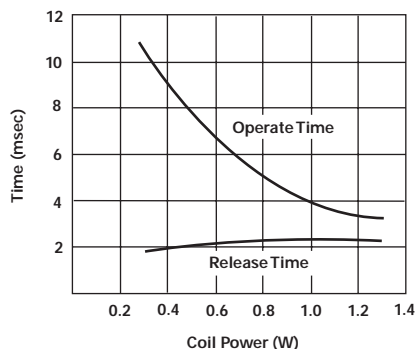

Life Expectancy

