

承認書

CERTIFICATE FOR CONFIRMATION

客 戶 Client: _____


客戶名稱 CUSTOMER: CHOKE 0.5H

產品名稱 PART NAME: FAAIR110V-0.5H

產品規格 DESCRIPTION: AIR COLL

版 本 REV: 1.0

送樣日期 DATE: 2015.11.17

富安 (fuantronics)	承辦 (prepared by)	審核 (checked by)	核准 (approved by)	印章 (seal)
	QA:	马娜 11.17		
客戶 (customer)	承辦 (prepared by)	審核 (checked by)	核准 (approved by)	

變更時間	REV.	變更內容



Tianchang Fuan Electronic Co.,Ltd

天长市富安电子有限公司


Tianchang Fuan Electronic Co.,Ltd

承認書目錄 (Specification)


客戶名稱 CUSTOMER: CHOKE 0.5H 產品名稱 PART NAME: FAAIR110V-0.5H

NO:	名稱(Title)	頁數 (Page)
1.	承認書封面(The cover of specification)	1.
2.	目錄(Catalog)	2.
3.	圖紙(Drawing)	3.
4.	檢測報告(Test report)	4.

Outline Dimensions(Unit:mm)

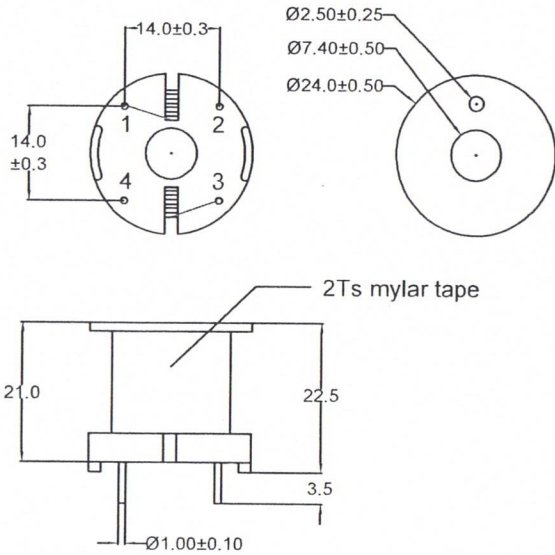


Winding Construction:

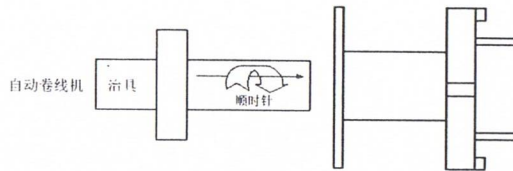

REV	DESCRIPTION	APPD	DATE

Electronical Schematic



Electrical Characteristics

Inductance: 0.53H ±3% at 1KHz 0.3V.
 D.C.Resistance: 3.07 Kohms ±3%(2.978~3.162 Kohms) .

Mat'l Description:

Bobbin: 4Pins bobbin.
 Wire: 2UEW-F/155C.
 Tape: JY25-A1/130C.

No.286 RenMin East Road,Renheji Town,Tianchang city,Anhui province,China
 TEL: +86-550-7814888/7811988 FAX:+86-550-7831133
 www.fuantronics.net

TOLERANCE LEVEL		 天长市富安电子有限公司 Tianchang Fuan Electronic Co.,Ltd				
X.	—	DWN: Yuing. yu	TITLE: AIR COIL			
.X	±0.50		FuAn P/N: FAAIR110V-0.5H			
.XX	±0.25	CHKD: Anson. zhan	Custome P/N: CHOKE 0.5H			
.XXX	—		APPD: Louis. Lin	UNITS	SHEET	REV.
		mm		1/1	1.0	Nov./09/2015

成品检验报告 Finish Goods Inspection Report

客户

Customer: DACHS

4 of 4



品名 PartName	FAAIR110V-0.5H	批量 Lot Size	5PCS	抽样数 Sampling Size	5PCS
品号 PartNumber	CHOKE 0.5H	温度/湿度 Temperature/Humidity	15±0.2℃	日期 Date	2015.11.17

电气特性 / FUN	项目 Item	L	DCR			判定 Judge
	测试PIN Test pin					
	测试条件 Test condition	1K 0.3V				
	测试规格 Testspecific	0.53H±3%	3.07 Kohms ±3% (2.978-3.162Kohms)			
	1	0.53	3.08		OK	
	2	0.53	3.06		OK	
	3	0.52	3.06		OK	
	4	0.53	3.08		OK	
	5	0.53	3.07		OK	
	6					
	7					
	8					
R	0.007	0.02				
Avg	0.5286	3.07				

外观 / A	项目/Item	WIDTH	LENGHT	HEIGHT PIN	φ	φ	φ	判定 Judge	
	规格/specific	22.5±0.5	21.0±0.5	3.5±0.5	24.0±0.5	7.40±0.5	2.50±0.25		
	1	22.44	21.16	4.38	23.95	7.35	2.49		OK
	2	22.44	21.15	4.33	23.95	7.36	2.45		OK
	3	22.44	21.16	4.32	24.01	7.35	2.47		OK
	4	22.45	21.17	4.34	24.06	7.35	2.46		OK
	5	22.43	21.13	4.32	23.93	7.34	2.48		OK
	6								
	7								
	8								
	R	0.02	0.04	0.06	0.13	0.02	0.04		
	Avg	22.44	21.154	4.338	23.98	7.35	2.47		

外观 / A	项目/Item	DISTANCE 1° PINS	DISTANCE 1° PINS	DIAMETER PIN		判定 Judge	
	规格/specific	14.0±0.3	14.0±0.3	1.00±0.10			
	1	13.97	13.97	0.96			OK
	2	13.93	13.94	0.96			OK
	3	13.97	13.94	0.96			OK
	4	13.95	13.96	0.96			OK
	5	13.96	13.92	0.96			OK
	6						
	7						
	8						
	R	0.04	0.05	0			
	Avg	13.956	13.946	0.96			

包装 / Package	项目/Item	检查结果/Inspection Ruslt	备注/Remark:
	标识/Identifier	OK	
	防护/Safety	OK	
	其它/Other	OK	

检验结果/Inspection Result <input checked="" type="checkbox"/> 合格/OK <input type="checkbox"/> 不合格/NG 异常单号 / F No:	核准 Approved by		检验 Check by	
---	-------------------	--	----------------	---