
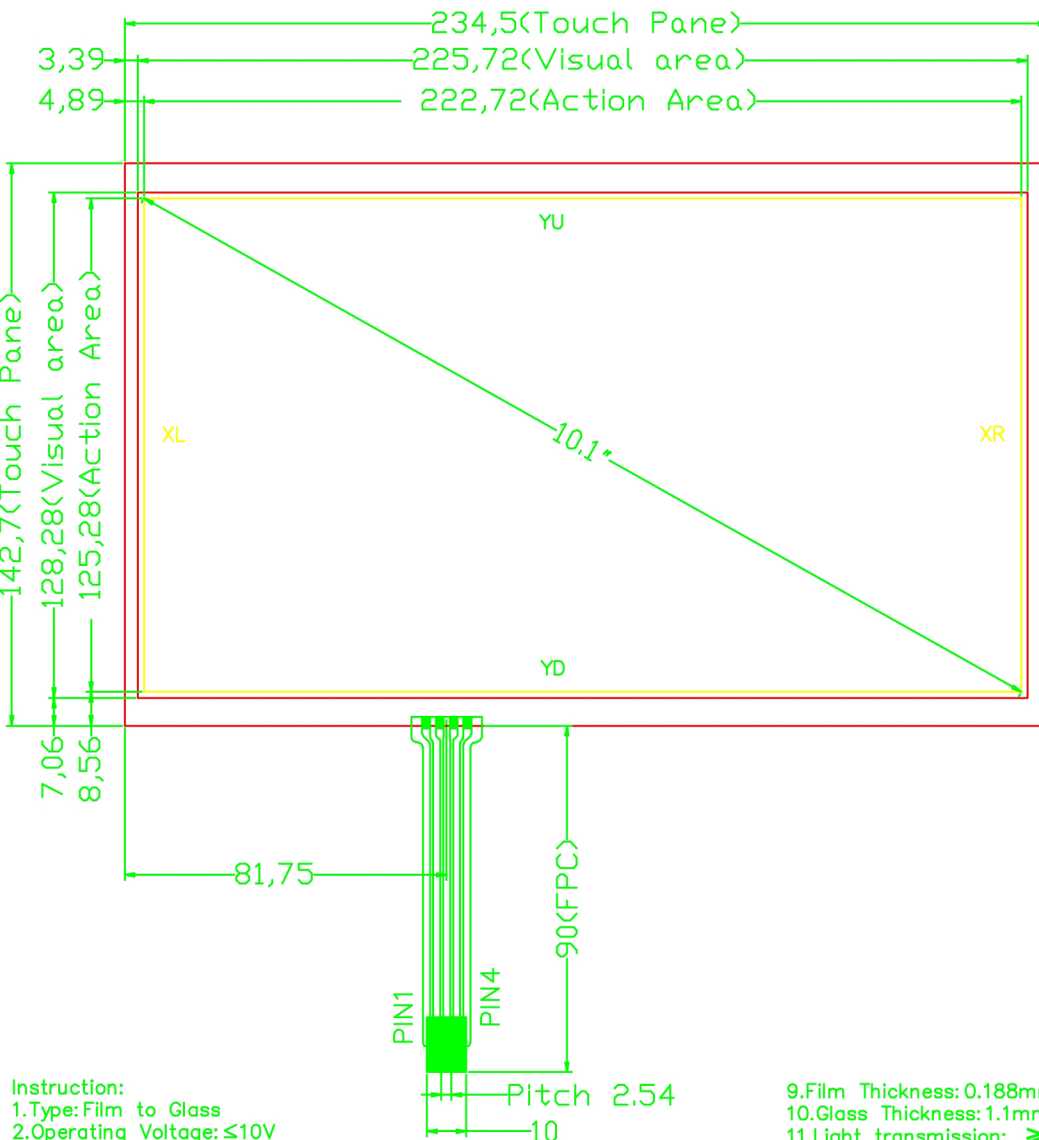


Version	MARK	MODIFY	DATE
3.0	FPC	FPC	20091224

Thick: 1.4 ± 0.15

hard coating anti newton ring
Front ITO film 0.188mm

Back ITO glass 1.1mm

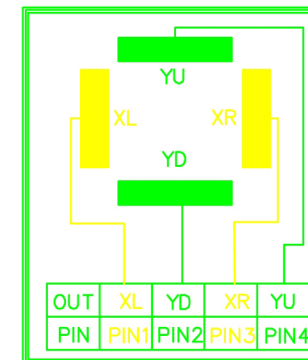

Instruction:

- 1.Type: Film to Glass
- 2.Operating Voltage: $\leq 10V$
- 3.Response Time: $\leq 10ms$
- 4.Storage Temperature: $-20^{\circ}\sim+70^{\circ}$
- 5.Operation Temperature/Humidity : $-10^{\circ}\sim+60^{\circ}/ 20\%\sim95\%$
- 6.Hitting Life: $>1,000,000$ Times ,250gf Force;
- 7.writing Life: $>100,000$ Times 250gf Force;
- 8.Connect Material:FPC

- 9.Film Thickness: 0.188mm
- 10.Glass Thickness: 1.1mm
- 11.Light transmission: $\geq 78\%$
- 12.Force: 100g or more
- 13.Linearity: $\leq 1.5\%$
- 14.Insulation: $\geq 20M\Omega$
- 15.Resistance: Y: $170\Omega\sim330\Omega$
X: $500\Omega\sim1100\Omega$
- 16.Surface Hardness $\geq 3H$ (pencil)

WVT-TP4-10. 1A2

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	4.0
UNIT	mm	TOLERANCE	$\pm 0.3mm$	NO.	1 of 1
DESIGN		DATE	20100108		
CHECK		DATE	20100108		
RELEASE		DATE	20100108		



DEVOTECH ELECTRONICS CO. LTD