



DEVETECH ELECTRONICS LIMITED

Address: 11/F., Front Block, Hang Lok Building, 130 Wing Lok St., Sheung Wan, HK

Registration. Nr.: 1994258

Email: info@devetechelectronics.com

SPECIFICATION FOR APPROVAL

CUSTOMER'S CODE:

FL-PZ-W2021-06-16

DESCRIPTION:

Metal Indicator Light

SPECIFICATION:

14mm

DATE:

2019-04-08

PART NO. DV: DVFL1M-14FW-1

REFERENCE No.:

FL-PZ-W2021-06-16

Form Designer	Qualified By	Approved By
Tao Song	Qu Bin	Chen Ping



DEVETECH ELECTRONICS LIMITED

Address: 11/F., Front Block, Hang Lok Building, 130 Wing Lok St., Sheung Wan, HK


Registration. Nr.: 1994258

Email: info@devetechelectronics.com

1. Picture:



2. Drawing:

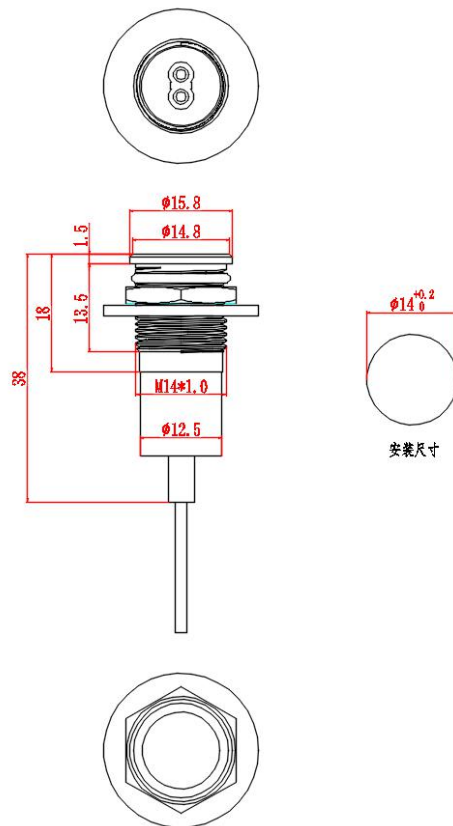



DEVETECH ELECTRONICS LIMITED

Address: 11/F., Front Block, Hang Lok Building, 130 Wing Lok St., Sheung Wan, HK

Registration. Nr.: 1994258

Email: info@devetechelectronics.com

3.Component Material

Component Name	Material
Lens	PC
Shell	Copper alloy
Gasket	A3 Iron
O-ring	Silica gel
Nut	Copper alloy
Lamp holder	PA66
Luminescent Source	LED
Resistance	Carbon Film Resistance
Wire Leading	Teflon

4.Performance Parameter

Items	Parameter
Voltage	3V-250V
Rated Current	20mA
Rated Power	0.2W
Insulation and voltage resistance	1800V
Working Life	100000h
Cold-Resistant	-40°C
Heat-Resistant	80°C



5. Detailed Picture :



6. LED Specification

6.1 Absolute Maximum Rating


Item	Symbol	Rated Value	Unit
Maximum Forward Current	IFP	20	mA
Reverse Voltage	VR	5	V
Power	PD	60	mW
Working Temp.	TOPR	-40~+80	°C
Storage Temperature	TSTG	-40~+100	°C
Lead-free Soldering Temperature	TSOL	Max. 260°C for 3sec Max.	

Notes:


- 1) Product photoelectric performance level, different levels of product photoelectric performance is different, please customers according to their own conditions of use to decide the use method.
- 2) The measurement of light intensity and dominant wavelength is corrected according to the CIE international standard of the human eye response curve.
- 3) When the brightness of the central axis is 50%, the luminous angle of one side is $\theta_{1/2}$, $2\theta_{1/2} = \theta_{1/2} + \theta_{1/2}$.
- 4) The measurement tolerance of luminous intensity is $\pm 15\%$.
- 5) The voltage is measured with a tolerance of ± 0.1 V.
- 6) The measurement tolerance of color coordinates X and Y is ± 0.015 .

6.2 Product Optoelectronic Characteristics (Ta = 25°C)


Item	Symbol	Condition	Min.	Average Value	Max.	Unit
Forward Voltage	VF	IF=20mA	2.8	--	3.2	V
Reverse Current	IR	VR=5v	--	--	5	μA
Angle	2θ1/2	IF=20mA	--	60	--	deg
Brightness	φ V	IF=20mA	500	--	800	mcd
Recommend Current	IF	--	--	20	--	mA
Color	cct& λ d	IF=20mA	520	--	525	nm
Junction Temperature	T _J	IF=20mA	--	125	--	°C
Thermal Resistance	R _{JP}	IF=20mA	--	8	--	°C/W

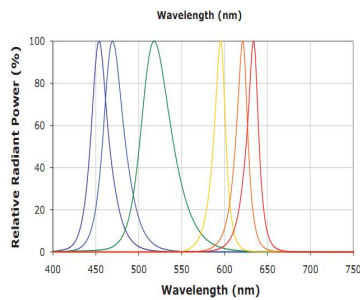


Wavelength characteristics

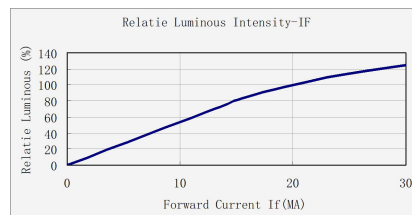

Light intensity and forward current curves

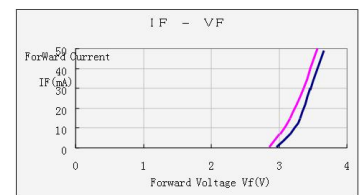

Reverse current vs. forward voltage plot

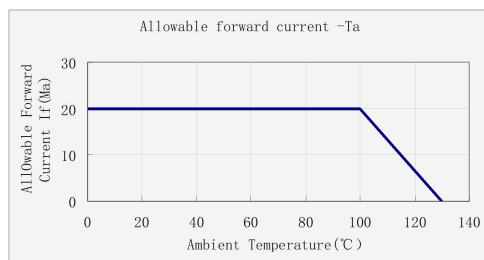

Maximum Forward DC vs. Temperature Graph

